

Developer Note

PowerBook G4



April 2002

Apple Computer, Inc.
© 2001, 2002 Apple Computer, Inc.
All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, mechanical, electronic, photocopying, recording, or otherwise, without prior written permission of Apple Computer, Inc., with the following exceptions: Any person is hereby authorized to store documentation on a single computer for personal use only and to print copies of documentation for personal use provided that the documentation contains Apple's copyright notice.

The Apple logo is a trademark of Apple Computer, Inc.
Use of the "keyboard" Apple logo (Option-Shift-K) for commercial purposes without the prior written consent of Apple may constitute trademark infringement and unfair competition in violation of federal and state laws.

No licenses, express or implied, are granted with respect to any of the technology described in this book. Apple retains all intellectual property rights associated with the technology described in this book. This book is intended to assist application developers to develop applications only for Apple-labeled or Apple-licensed computers. Every effort has been made to ensure that the information in this document is accurate. Apple is not responsible for typographical errors.

Apple Computer, Inc.
1 Infinite Loop
Cupertino, CA 95014
408-996-1010

Apple, the Apple logo, AirPort, FireWire, iMac, Mac, and Macintosh are trademarks of Apple Computer, Inc., registered in the United States and other countries.

iBook, SuperDrive, and Velocity engine are trademarks of Apple Computer, Inc.

Adobe is a trademark of Adobe Systems Incorporated or its subsidiaries and may be registered in certain jurisdictions.

OpenGL is a registered trademark of Silicon Graphics, Inc.

PowerPC is a trademark of International Business Machines Corporation, used under license therefrom.

Simultaneously published in the United States and Canada

Even though Apple has reviewed this manual, APPLE MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THIS MANUAL, ITS QUALITY, ACCURACY, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS MANUAL IS SOLD "AS IS," AND YOU, THE PURCHASER, ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND ACCURACY.

IN NO EVENT WILL APPLE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT OR INACCURACY IN THIS MANUAL, even if advised of the possibility of such damages.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED. No Apple dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Contents

Preface	About This Developer Note	9
----------------	----------------------------------	---

	Contents of This Note	9
--	-----------------------	---

Chapter 1	Introduction	11
------------------	---------------------	----

	New Features	11
	Features	13
	Appearance	15
	Peripheral Devices	16
	System Software	17
	Open Firmware	17
	Machine Identification	18
	Power Saving Features	18
	PowerStep	18
	Operating Modes	19

Chapter 2	Architecture	21
------------------	---------------------	----

	Block Diagram and Buses	21
	Block Diagram	21
	Main ICs and Buses	23
	Microprocessor and Caches	23
	PowerPC G4 Microprocessor	23
	Level-2 Cache	24
	Level-3 Cache	24
	Memory Controller and Bus Bridge	24
	System RAM	25
	Boot ROM	25
	FireWire Controller	26
	Ethernet Controller	26
	Video Display Subsystem	26

C O N T E N T S

I/O Controller	27
DMA Support	28
Interrupt Support	28
USB Interface	28
Ultra ATA/66 Interface	29
EIDE Interface	29
Modem Support	29
Sound Circuitry	29
Power Controller	30
AirPort Card Interface	30
CardBus Controller IC	30

Chapter 3 **Devices and Ports** 31

USB Ports	31
USB Connectors	31
Booting from a USB Device	32
FireWire Port	33
FireWire Connector	33
FireWire Device Programming	35
Target Disk Mode	35
Ethernet Port	36
Internal Modem	38
AirPort Card	38
Data Security	39
AirPort Hardware	39
AirPort Software	39
Hard Disk Drive	40
Hard Disk Dimensions	40
Hard Disk Connector	42
Signal Assignments	43
ATA Signal Descriptions	44
DVD-ROM/CD-RW Combo Drive	46
Trackpad	47
Keyboard	47
Removing the Keyboard	47
Changing the Operation of the Keyboard	48

C O N T E N T S

Keyboard Illustrations	48
Using the Fn Key	52
Using the Num Lock Key	52
The Function-Keys Checkbox	52
The Embedded Keypad	54
Other Control Keys	55
Flat Panel Display	55
External Monitors	57
Dual Display and Mirror Mode	57
Analog Monitor Resolutions	58
Digital Display Resolutions	59
DVI-I Connector	59
External Video Port	61
Sound System	63
Sound Inputs	63
Built-in Microphone	64
Audio Input Jack	64
Modem Activity Sound Signals	64
Sound Outputs	64
Headphone Jack	64
Internal Speakers	65
Digitizing Sound	65

Chapter 4 Expansion Features 67

RAM Expansion Slots	67
Getting Access to the Slots	67
Mechanical Design of RAM SO-DIMMs	69
Electrical Design of RAM SO-DIMMs	69
SDRAM Devices	70
Configuration of RAM SO-DIMMs	71
Address Multiplexing	71
RAM SO-DIMM Electrical Limits	72
CardBus Slot	73

C O N T E N T S

Appendix A Supplemental Reference Documents 75

Apple Technotes	75
3D Graphics	76
PowerPC G4 Microprocessor	76
Velocity Engine (AltiVec)	76
Mac OS X	77
I/O Kit	77
Mac OS 9	78
Open Firmware	78
RAM Expansion Modules	79
PC Card Manager	79
ATA Devices	80
USB Interface	80
FireWire Interface	81
Digital Visual Interface	81
Wireless Networks	82

Appendix B Abbreviations 83

Abbreviations and Standard Units	83
Other Abbreviations	84

Index	87
-------	----

Figures and Tables

Chapter 1 Introduction 11

Figure 1-1	Front view of the computer	15
Figure 1-2	Back view showing I/O ports	16
Table 1-1	Feature changes	12

Chapter 2 Architecture 21

Figure 2-1	Block diagram	22
Table 2-1	Buses supported by the Uni-N IC	25

Chapter 3 Devices and Ports 31

Figure 3-1	USB Type A port	32
Figure 3-2	FireWire connector	34
Figure 3-3	Maximum dimensions of the internal hard disk	41
Figure 3-4	Hard disk connector and location	42
Figure 3-5	Keyboard layout	49
Figure 3-6	Alternate operations of function and control keys	50
Figure 3-7	Embedded numeric keypad operation	51
Figure 3-8	DVI-I connector	59
Figure 3-9	S-video connector	61
Table 3-1	Pin assignments on the USB port	32
Table 3-2	Pin assignments on the FireWire connector	34
Table 3-3	Signals for 10Base-T and 100Base-T operation	36
Table 3-4	Signals for 1000Base-T operation	37
Table 3-5	Pin assignments on the ATA hard disk connector	43
Table 3-6	Signals on the ATA hard disk connector	44
Table 3-7	Types of media read and written by the DVD-ROM/CD-RW drive	46
Table 3-8	Setting the default behavior of the function keys	53
Table 3-9	The function keys as control buttons	53

FIGURES AND TABLES

Table 3-10	Embedded keypad keys	54
Table 3-11	Control keys that change	55
Table 3-12	Picture sizes on the flat panel display	56
Table 3-13	Picture sizes on an analog monitor	58
Table 3-14	Picture sizes on a digital display	59
Table 3-15	Main signals on the DVI-I connector	60
Table 3-16	MicroCross signals on the DVI-I connector	60
Table 3-17	Pin assignments for the S-video output connector	61
Table 3-18	Picture sizes for S-video output	62

Chapter 4 Expansion Features 67

Figure 4-1	Interior view showing RAM expansion slots	68
Table 4-1	Sizes of RAM expansion modules and devices	71
Table 4-2	Types of DRAM devices	72

About This Developer Note

This developer note is a technical description of the PowerBook G4 computer. The note provides information about the computer's internal design, input-output features, and expansion capabilities.

Note: This developer note has been updated to include information about the latest product features and configurations.

This developer note is intended to help hardware and software developers design products that are compatible with the Macintosh products described here. If you are not already familiar with Macintosh computers or if you would like additional technical information, you may wish to read the supplementary reference documents described in [Appendix A](#) (page 75).

Contents of This Note

The information in this note is arranged in four chapters and two appendixes.

- [Chapter 1, “Introduction”](#) (page 11), introduces the PowerBook G4 computer and describes its features.
- [Chapter 2, “Architecture”](#) (page 21), describes the internal logic of the computer, including the main ICs that appear in the block diagram.
- [Chapter 3, “Devices and Ports”](#) (page 31), describes the standard I/O ports and the built-in I/O devices.

P R E F A C E

About This Developer Note

- [Chapter 4, “Expansion Features”](#) (page 67), describes the expansion features of interest to developers. It includes development guides for expansion-bay devices, the RAM expansion modules, and the PC Card slot.
- [Appendix A](#) (page 75) contains links to supplemental reference documents.
- [Appendix B](#) (page 83) is a list of the abbreviations used in this developer note.

Introduction

This chapter outlines the features of the PowerBook G4 computer, with emphasis on the changes from the previous models.

New Features

The features that have changed are listed here along with references to the sections that describe them. For a quick summary of the changes, see Table 1-1.

- **Processor:** The computer has a PowerPC G4 microprocessor running at a clock speed of 667 or 800 MHz. For more information, see “PowerPC G4 Microprocessor” (page 23).
- **System bus:** The speed of the system bus in all models is 133 MHz.
- **Cache locations and speeds:** The L2 cache is located on the processor IC; the clock speed ratio is 1:1. The computer also has an L3 cache. See “Level-2 Cache” (page 24).
- **Flat-panel display:** The wide-screen display has a resolution of 1280 by 854 pixels at 101.4 dpi.
- **Graphics IC and memory:** The ATI Mobility Radeon 7500 graphics processor operates on the AGP 4x bus along with 32 MB of DDR RAM. For more information, see “Video Display Subsystem” (page 26).
- **Hard disk storage:** The computer comes with a built-in hard disk drive with a capacity of 30, 40, or 60 GB. For more information and developer guidelines for alternative hard drives, see “Hard Disk Drive” (page 40).

Introduction

- **Digital display connector:** The computer has a DVI-I connector that supports flat-panel digital monitors. (A VGA adapter is included.) See “DVI-I Connector” (page 59).
- **AirPort Card standard:** An AirPort Card is standard in the 800-MHz model. See “AirPort Card” (page 38).
- **Analog audio input:** The sound system includes an analog audio input (line in). See “Sound Inputs” (page 63).

Table 1-1 Feature changes

Feature	Previous model	Latest model
Processor	PowerPC G4	PowerPC G4
Processor clock speed	550 or 667 MHz	667 or 800 MHz
L2 cache size and speed ratio	256 KB, 1:1	256 KB, 1:1
L3 cache size and speed ratio	None	1 MB, 4:1
System bus speed	100 or 133 MHz	133 MHz
Graphics IC	ATI Mobility Radeon	ATI Mobility Radeon 7500
Display memory	16 MB of DDR	32 MB of DDR
Display resolution	1152 by 768 pixels, 91.1 dpi	1280 by 854 pixels, 101.4 dpi
Connector for digital monitors	None	DVI-I connector
Hard disk drive	20, 30, or 48 GB	30, 40, or 60 GB
AirPort Card	On 667-MHz models only	On 800-MHz model only
Audio line in	not available	available
Infrared Port	available	not available

Features

Here is a list of the features of the PowerBook G4 computer. Each feature is described in a later chapter, as indicated in the list.

- **Processor:** The computer has a PowerPC G4 microprocessor running at a clock speed of 667 or 800 MHz. For more information, see “PowerPC G4 Microprocessor” (page 23).
- **System bus:** The speed of the system bus is 133 MHz in all models.
- **Cache location and speed:** In addition to the L2 cache, which is internal to the processor IC, the computer also has an L3 cache. See “Level-2 Cache” (page 24).
- **RAM:** The computer has two standard SO-DIMM expansion slots for SDRAM modules. The computer comes with 256 or 512 MB of SDRAM installed. See “RAM Expansion Slots” (page 67).
- **ROM:** The computer has 1 MB of boot ROM used by Open Firmware at startup. For information about the ROM, see “Boot ROM” (page 25). For information about Open Firmware, see “Open Firmware” (page 78).
- **Hard disk storage:** The computer comes with a built-in hard disk drive with a capacity of 30, 40, or 60 GB. For more information and developer guidelines for alternative hard drives, see “Hard Disk Drive” (page 40).
- **Display:** 15.2-inch wide-screen TFT display (1280 by 854 pixels) with a resolution of 101.4 dpi. See “Flat Panel Display” (page 55).
- **External monitor:** All configurations support an external video monitor, using the DVI-I connector for a digital video display and an S-video connector for a PAL or NTSC video monitor. (A VGA adapter is included and an ADC adapter is available separately.) See “External Monitors” (page 57).
- **Graphics IC and memory:** The ATI Mobility Radeon 7500 graphics controller operates on the AGP 4x bus along with 32 MB of video RAM. For more information, see “Video Display Subsystem” (page 26).
- **Battery bay:** The computer has a single battery bay. The battery uses lithium ion cells and provides 55.3 watt-hours at 14.4 V (nominal).

Introduction

- **DVD-ROM/CD-RW Combo drive:** All configurations have a built-in DVD-ROM/CD-RW drive. See “DVD-ROM/CD-RW Combo Drive” (page 46).
- **CardBus slot:** The computer has a CardBus slot that accepts one Type I or Type II PC card or a CardBus Card. For more information, see “CardBus Slot” (page 73).
- **USB ports:** The computer has two USB 1.1 ports for an external keyboard, a mouse, and other USB devices, described in “USB Ports” (page 31).
- **FireWire port:** The computer has one IEEE-1394a high-speed serial FireWire port, which supports transfer rates of 100, 200, and 400 Mbps. For more information, see “FireWire Port” (page 33).
- **Target Disk Mode:** The PowerBook G4 computer can act like a FireWire storage device connected to another computer. See “Target Disk Mode” (page 35)
- **Modem:** The computer has a built-in modem with 56 Kbps data rate and V.90 support. For more information, see “Internal Modem” (page 38).
- **Ethernet:** The computer has a built in Ethernet port with an RJ-45 connector for 10Base-T, 100Base-T, and 1000Base-T operation. For more information, see “Ethernet Port” (page 36).
- **AirPort Card:** An AirPort Card wireless LAN card is standard on the 800-MHz model. For more information, see “AirPort Card” (page 38).
- **Sound:** The computer has a built-in microphone and stereo speakers as well as a stereo headphone jack and a sound input jack. See “Sound System” (page 63)
- **Keyboard:** The keyboard has an embedded numeric keypad and inverted-T arrow keys. Some of the function keys are used to control the display brightness and speaker volume; the other function keys are programmable by the user. See “Keyboard” (page 47).
- **Trackpad:** The integrated trackpad includes tap/double tap and drag features. For more information, see “Trackpad” (page 47).
- **Weight:** The basic configuration weighs 2.4 kg (5.4 pounds).
- **Size:** The computer is 341 mm (13.4 inches) wide, 241 mm (9.49 inches) deep, and 26.3 mm (1.04 inches) thick.

Appearance

Figure 1-1 is a front view of the PowerBook G4 computer. Figure 1-2 is a back view showing the I/O ports.

Figure 1-1 Front view of the computer


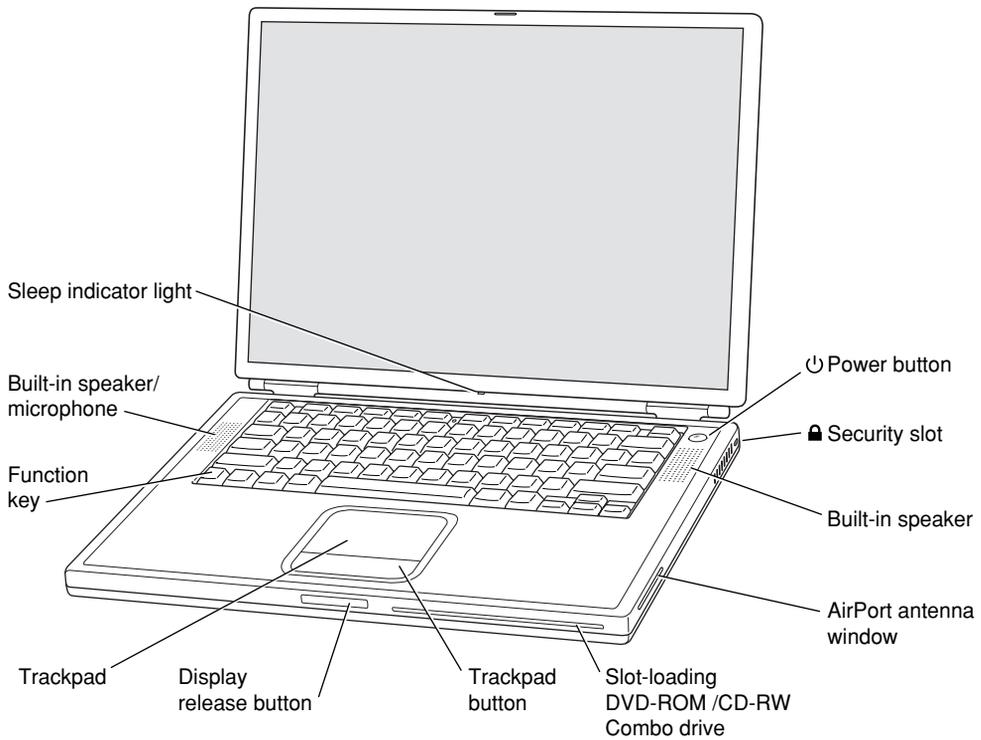


Figure 1-2 Back view showing I/O ports

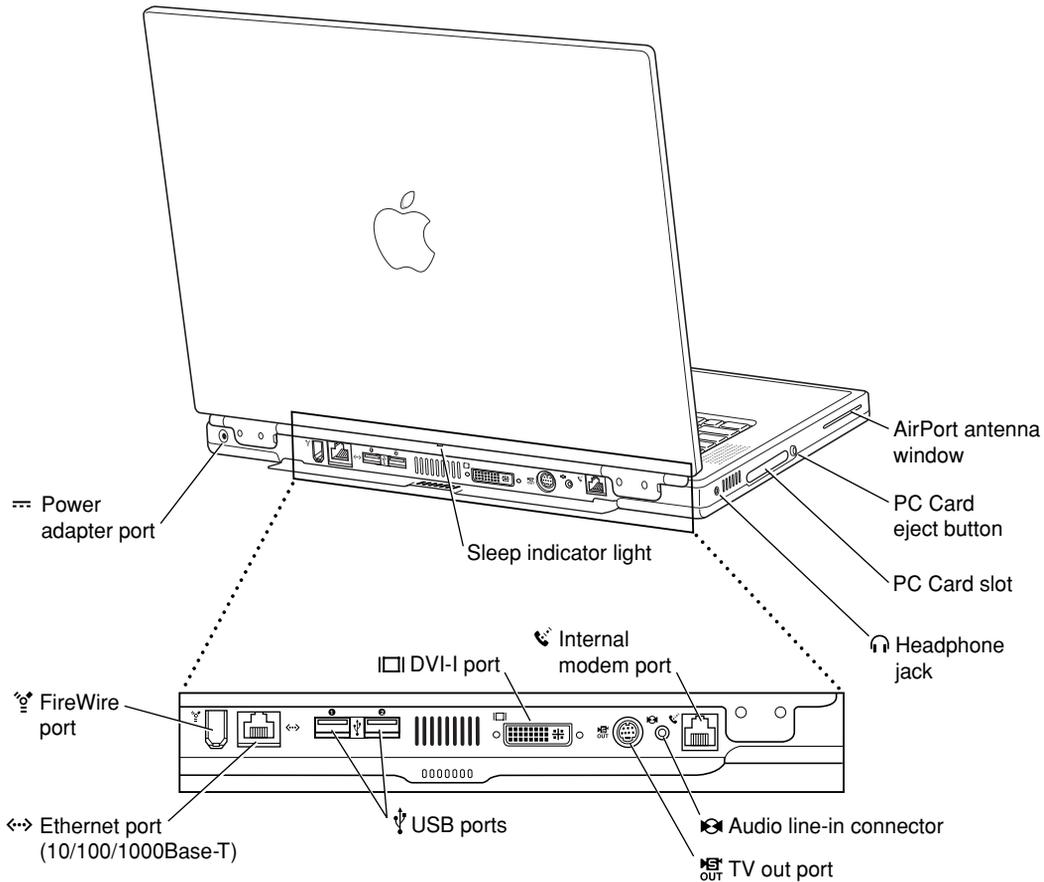

Peripheral Devices

In addition to the devices that are included with the computer, several peripheral devices are available separately:

- The PowerBook Intelligent Lithium Ion Battery is available separately as an additional or replacement battery.
- The Apple Portable Power Adapter, which comes with the computer, is also available separately. The adapter can recharge the internal battery in less than five hours while the computer is running or less than three hours while the computer is shut down or in Sleep mode.
- The Apple DVI to ADC Adapter, which enables the PowerBook G4 computer to support Apple's ADC displays, is available separately.
- The Apple Pro Keyboard, a full-featured USB keyboard, is available separately.
- The Apple Pro Mouse, an optical USB mouse, is available separately.
- The AirPort Base Station is available separately.
- The AirPort Card is also available separately.

System Software

The PowerBook G4 computer comes with both Mac OS 9.2.2 and Mac OS X version 10.1.3 installed. Mac OS X is the default startup system. For the latest information, see the references listed in "Mac OS 9" (page 78) and "Mac OS X" (page 77).

Here are a few items of interest about the system software on the PowerBook G4 computer.

Open Firmware

System software on all current Macintosh models uses a design based on Open Firmware. With this approach, the ROM on the main logic board contains only the Open Firmware code needed to initialize the hardware and load an operating system. The rest of the system code is loaded into RAM from disk or from the network. For more information, see the references listed in "Open Firmware" (page 78).

Machine Identification

Rather than reading the box flag or the model string and then making assumptions about the computer's features, applications that need to find out the features of the computer should use IORegistry calls to test for the features they require. IORegistry calls are part of the I/O Kit API. For more information, see the references listed at "I/O Kit" (page 77).

Asset management software that reports the kind of computer it is running on can obtain the value of the model property from the IOService plane of the IORegistry. For the PowerBook G4 computer, the value of the model property is `PowerBook3,4`.

Power Saving Features

The PowerBook G4 computer has several features that save power. Among them are PowerStep and two operating modes: Idle and Sleep.

PowerStep

PowerStep is a technique that allows the software to change the processor's clock speed, slowing down to conserve power or speeding up when more speed is needed. On the 800-MHz model, the slower clock speed is 667 MHz and the L3 cache is turned off as well. On the 667-MHz model, the clock speed is unchanged; only the L3 cache is turned off.

The PowerStep feature is accessible from the system software, from applications, and from the user interface.

- The system software uses PowerStep to conserve power under the following conditions:
 - During system startup
 - When battery charge is low
 - When there is no battery installed
 - When using airline power
- Applications that need to change the speed setting can use the API provided by the Energy Services Library in the system software.

Introduction

- The user interface for the PowerStep feature is a check box labeled Reduce Processor Performance in the Advanced Settings panel of the Energy Saver control panel.

Operating Modes

The power management protocols on the PowerBook G4 computer support two power-saving modes: Idle and Sleep.

- Idle: The system is idling with the main processor stopped in Nap mode. All clocks are running; the system can return to running code within a few nanoseconds. Cache coherency is maintained in this level of idle.
- Sleep: The system is completely shut down, with only the DRAM state preserved for quick recovery. All processors are powered off with their state preserved in DRAM. All clocks in the system are suspended except for the 32.768 kHz timebase crystal on the PMU99 IC.

The computer automatically enters Idle mode after several seconds of inactivity. If the computer is attached to a network, it is able to respond to service requests and other events directed to the computer while it is in Idle mode.

While it is connected to an AC power supply, the computer can also respond to network activity when it is in Sleep mode. The user can enable this feature by selecting Wake-on-LAN in the Energy Saver control panel.

In Sleep mode, the computer consumes less than 1 watt of power. That allows it to meet the Energy Star power-saving standard.

Important

Peripherals such as PCMCIA cards and USB devices that do not conform to the computer's power management protocols prevent the computer from switching to Sleep mode and so deny the user the benefits of this energy-saving mode. When such peripherals are attached to the computer, the operating system displays a dialog box to inform the user that the computer no longer meets the Energy Star requirements.

C H A P T E R 1

Introduction

Architecture

This chapter describes the architecture of the PowerBook G4 computer. It includes information about the major components on the main logic board: the microprocessor, the other main ICs, and the buses that connect them to each other and to the I/O interfaces.


Block Diagram and Buses

This section is an overview of the major ICs and buses on the computer's main logic board.

Block Diagram

Figure 2-1 is a simplified block diagram of the main logic board. The diagram shows the input and output connectors, the main ICs, and the buses that connect them together.

Figure 2-1 Block diagram

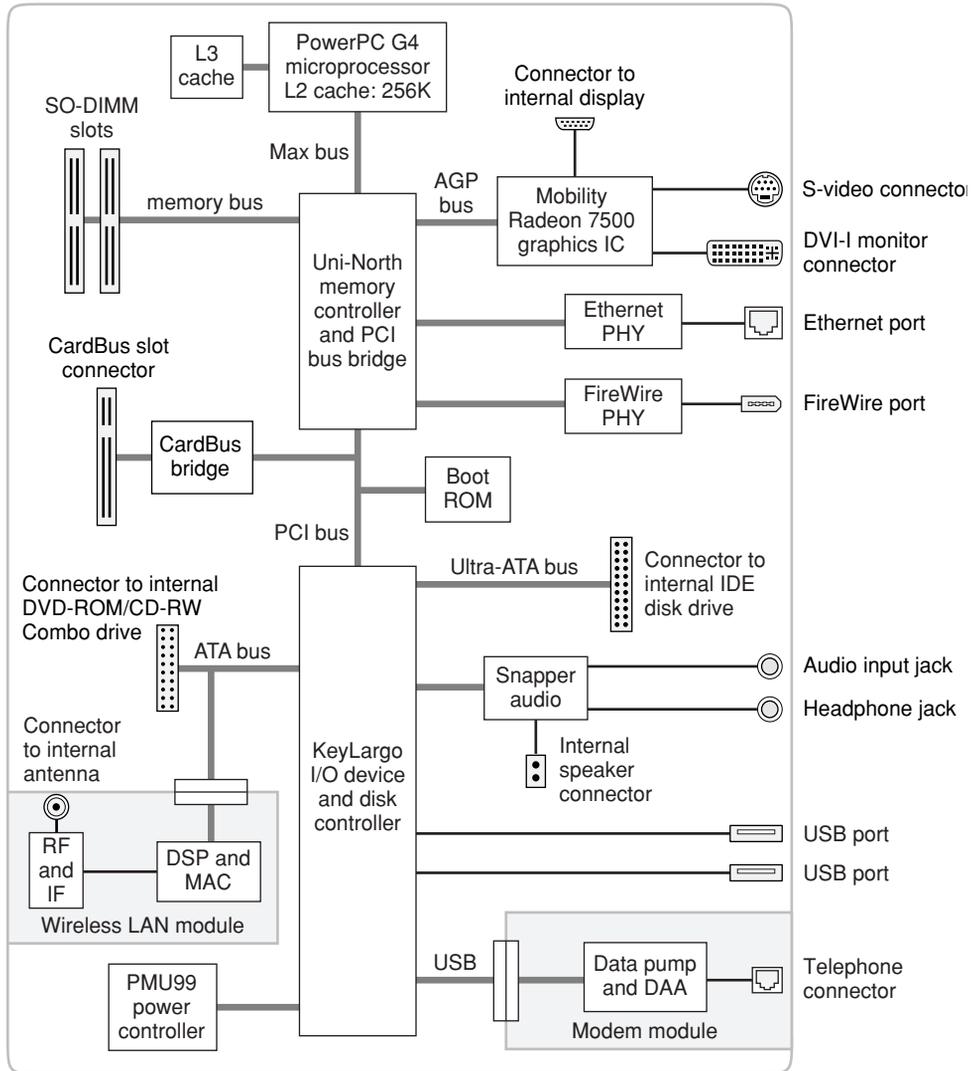

Main ICs and Buses

The architecture of the PowerBook G4 computer is designed around the PowerPC G4 microprocessor and two custom ICs: the Uni-N memory controller and bus bridge, and the KeyLargo I/O device controller. Those three ICs occupy the center of the block diagram.

The PowerPC G4 microprocessor is connected to the Uni-N memory controller and bus bridge IC by a MaxBus bus. The bus clock speed is 133 MHz. The Uni-N IC has other buses that connect with the KeyLargo IC, the main system RAM, and the graphics IC. The buses implemented by the Uni-N IC are summarized in Table 2-1, which is in the section “Memory Controller and Bus Bridge” (page 24).

The Uni-N IC is connected to the KeyLargo I/O controller IC by a 32-bit PCI bus with a bus clock speed of 33 MHz. That bus also connects to the Boot ROM and the CardBus controller. The KeyLargo IC has other buses that connect with the hard disk drive and the DVD-ROM/CD-RW drive, the power controller IC, the sound IC, the internal modem module, and the wireless LAN module.

Each of the components listed here is described in one of the following sections.

Microprocessor and Caches

The microprocessor communicates with the rest of the system by way of a 64-bit MaxBus bus to the Uni-N IC. The microprocessor has a separate bus to its internal second-level cache.

PowerPC G4 Microprocessor

The PowerPC G4 microprocessor used in the Power Mac G4 computer has many powerful features, including a new pipelined system bus that is more efficient than the system bus on the PowerPC G3 microprocessors. The new bus design, called MaxBus, allows for much greater efficiency of bus utilization than was possible with the previous design.

Features of the PowerPC G4 include:

Architecture

- 32-bit PowerPC implementation
- superscalar PowerPC core
- Velocity Engine (AltiVec technology): 128-bit-wide vector execution unit
- dual 32 KB instruction and data caches (the same as PowerPC G3)
- an on-chip level-2 (L2) cache consisting of 256 KB with a clock speed ratio of 1:1
- high bandwidth MaxBus (also compatible with 60x bus)
- fully symmetric multiprocessing capability

The PowerPC G4 microprocessor in the PowerBook G4 computer runs at a clock speed of 667 or 800 MHz.

Level-2 Cache

The data storage for the L2 cache consists of 256 KB of fast static RAM that is built into the microprocessor chip along with the cache controller and tag storage. The built-in L2 cache runs at the same clock speed as the microprocessor.

Level-3 Cache

The data storage for the L3 cache is 1 MB of DDR SRAM running at a clock speed ratio of 4:1. The tag storage for the L3 cache is built into the microprocessor.

Memory Controller and Bus Bridge

The Uni-N memory controller and bus bridge IC provides cost and performance benefits by combining several functions into a single IC. It contains the memory controller, the PCI bus bridge, the Ethernet and FireWire interfaces, and the AGP interface.

Each of the separate communication channels in the Uni-N IC can operate at its full capacity without degrading the performance of the other channels.

Architecture

In addition to the four buses listed in Table 2-1, the Uni-N IC also has separate interfaces to the physical layer (PHY) ICs for Ethernet and FireWire, and an IIC (inter IC control bus) interface that is used for configuring the memory subsystem.

Table 2-1 Buses supported by the Uni-N IC

Name of bus	Destinations	Width of data path	Bus clock speed
MaxBus bus	Microprocessor	64 bits	133 MHz
Memory bus	System RAM	64 bits	133 MHz
PCI bus	KeyLargo IC and Boot ROM	32 bits	33 MHz
AGP bus	Graphics IC	32 bits	133 MHz

The microprocessor and the I/O controller IC are described in their own sections. The following sections describe the other subsystems that are connected to the Uni-N IC.

System RAM

The memory subsystem in the PowerBook G4 computer supports two slots for 144-pin SO-DIMMs (small-outline dual inline memory modules). The data bus to the RAM and DIMM is 64 bits wide, and the memory interface is synchronized to the MaxBus bus interface at 133 MHz. See “RAM Expansion Slots” (page 67).

Boot ROM

The boot ROM is connected to the Uni-N IC by way of the high byte of the PCI bus plus three additional control signals: chip select, write enable, and output enable. The boot ROM is a 1 M by 8 bit device.

FireWire Controller

The Uni-N IC includes an IEEE 1394a FireWire controller with a maximum data rate of 400 Mbits (50MB) per second. The Uni-N IC provides DMA (direct memory access) support for the FireWire interface.

The controller in the Uni-N IC implements the FireWire link layer. A physical layer IC, called a PHY, implements the electrical signalling protocol of the FireWire interface and provides the electrical signals to the port. For more information, see “FireWire Connector” (page 33).

Ethernet Controller

The Uni-N IC includes an Ethernet media access controller (MAC) that implements the Link layer. The Uni-N IC provides DB-DMA support for the Ethernet interface.

The Ethernet controller in the Uni-N IC is connected to a PHY interface IC that provides the electrical signals to the port. The PHY is capable of operating in either 10Base-T, 100Base-TX, or 1000Base-T mode: The actual speed of the link is automatically negotiated by the PHY and the bridge or router to which it is connected. For more information, see “Ethernet Port” (page 36).

The PHY supports Auto-MDIX, which allows the use of straight-through cables in crossover situations (and conversely). For more information, see “Ethernet Port” (page 36).

Video Display Subsystem

The video display subsystem contains the graphics controller IC along with 32 MB of DDR memory—16 MB internal and another 16 MB external to the IC. The graphics IC, an ATI Mobility Radeon 7500, contains 2D and 3D acceleration engines, front-end and back-end scalers, a CRT controller, and an AGP 4X bus interface with bus master capability.

The features of the Mobility Radeon 7500 include

- graphics processor clock speed of 230 MHz
- memory clock speed of 183 MHz
- support for 32 MB of DDR video memory with 128-bit interface

Architecture

- 2D and 3D graphics acceleration
- transform acceleration
- lighting acceleration
- video acceleration
- support for MPEG decoding
- support for video mirror mode
- support for dual-display mode
- S-video output for a TV monitor

The interface between the graphics IC and the rest of the system is an AGP 4x (accelerated graphics port, quadruple speed) bus on the Uni-N IC. To give the graphics IC fast access to system memory, the AGP bus has separate address and data lines and supports deeply pipelined read and write operations. The AGP bus has 32 data lines and a clock speed of 133 MHz.

The graphics IC uses a graphics address remapping table (GART) to translate AGP logical addresses into physical addresses. The graphics driver software can allocate memory in both the graphics SDRAM and the main memory.

The graphics IC supports the built-in flat-panel display and an external monitor. The external monitor can either mirror the built-in display or show additional desktop space (dual-display mode). For information about the displays and supported resolutions, see “Flat Panel Display” (page 55) and “External Monitors” (page 57).

I/O Controller

The I/O controller IC in the PowerBook G4 computer is a custom IC called KeyLargo. It provides the interface and control signals for the following devices and functions:

Note: In the device tree, the I/O controller is named “mac-io”.

DMA Support

The KeyLargo IC provides DB-DMA (descriptor-based direct memory access) support for the following I/O channels:

- Ultra DMA ATA interface to the the internal hard drive
- modem slot interface to the built-in modem
- IIS channel to the sound IC

The DB-DMA system provides a scatter-gather process based on memory resident data structures that describe the data transfers. The DMA engine is enhanced to allow bursting of data files for improved performance.

Interrupt Support

The KeyLargo IC has an interrupt controller (MPIC) that handles interrupts generated within the IC as well as external interrupts, such as those from the Ethernet and FireWire controllers.

USB Interface

The KeyLargo IC implements two independent USB controllers (root hubs), each of which is connected to one of the ports on the back panel of the computer. The use of two independent controllers allows both USB ports to support high data rate devices at the same time with no degradation of their performance. If a user connects a high-speed (12 Mbps) device to one port and another high-speed device to the other, both devices can operate at their full data rates.

The two external USB connectors support USB devices with data transfer rates of 1.5 Mbps or 12 Mbps. For more information about the connectors, see “USB Connectors” (page 31).

USB devices connected to the PowerBook G4 computer are required to support USB-suspend mode as defined in the USB specification. Information about the operation of USB-suspend mode on Macintosh computers is included in the Mac OS USB DDK API Reference. To obtain it, see the reference at “[USB Interface](#)” (page 80).

The USB ports on the PowerBook G4 computer comply with the Universal Serial Bus Specification 1.1 Final Draft Revision. The USB controllers comply with the Open Host Controller Interface (OHCI) specification.

Architecture

Ultra ATA/66 Interface

The KeyLargo IC provides an Ultra ATA/66 channel that is connected to the internal hard disk drive. The KeyLargo IC provides DB-DMA (descriptor-based direct memory access) support for the Ultra DMA interface.

The internal hard disk drive is connected as device 0 (master) in an ATA Device 0/1 configuration.

EIDE Interface

The KeyLargo IC provides an EIDE interface (ATA bus) that supports the the Combo (DVD-ROM/CD-RW) drive and the wireless LAN module. The Combo drive is an ATAPI drive and is connected as device 0 (master) in an ATA Device 0/1 configuration.

Modem Support

Unlike earlier Macintosh models which used serial-port modems, the internal modem is connected to an internal USB port. The KeyLargo IC provides DB-DMA support for the modem interface. The modem provides digital call progress signals to the Snapper sound circuitry.

The internal modem is a separate module that contains the datapump IC and the interface to the telephone line (DAA). For more information about the modem, see “Internal Modem” (page 38).

Sound Circuitry

The sound circuitry, called Snapper, is connected to the KeyLargo IC by a standard IIS (inter IC sound) bus. The KeyLargo IC provides DB-DMA (descriptor-based direct memory access) support for the IIS port.

Note: In the device tree, the sound circuitry is named “sound”.

The Snapper circuitry includes a signal processing IC that handles the equalization and volume control functions, a codec IC that performs A-to-D and D-to-A conversion, and a power amplifier that drives the headphone jack.

Architecture

All audio is handled digitally inside the computer. The Snapper circuitry performs digital-to-analog conversion for the audio signals to the internal speakers and the headphone jack.

For a description of the features of the sound system, see “Sound System” (page 63)

Power Controller

The power management controller in the PowerBook G4 computer is a custom IC called the PMU99. It supports several power-saving modes of operation, including idle, doze, and sleep. For more information, see “Power Saving Features” (page 18).

Note: In the device tree, the power controller is named “via-pmu”.

AirPort Card Interface

The interface between the AirPort Card and the KeyLargo IC uses the same data bus as the optical drive but has its own control signals.

The AirPort Card contains a media access controller (MAC), a digital signal processor (DSP), and a radio-frequency (RF) section. The card has a connector for the cable to the antennas.

Two antennas are built into the computer’s case. To improve reception, a diversity module between the antennas and the connector measures the signal strength from both antennas and sends the stronger one to the card.

The design of the AirPort Card is based on the IEEE 802.11 standard. The card transmits and receives data at up to 11 Mbps and is compatible with older systems that operate at 1 or 2 Mbps. For information about its operation, see “AirPort Card” (page 38).

CardBus Controller IC

The interface to the PC Card slot is connected to the PCI bus. The CardBus controller IC is a PCI1410A device made by Texas Instruments. It supports both 16-bit PC Cards and 32-bit CardBus Cards.

Devices and Ports

This chapter describes both the built-in I/O devices and the ports for connecting external I/O devices. Each of the following sections describes an I/O port or device.

USB Ports

The PowerBook G4 computer has two external USB 1.1 ports that can be used to connect additional I/O devices such as a USB mouse, printers, scanners, and low-speed storage devices.

The USB ports on the PowerBook G4 computer comply with the Universal Serial Bus Specification 1.1 Final Draft Revision. For more information about USB on the Macintosh computer, consult the references at “USB Interface” (page 80).

USB Connectors

The USB ports use USB Type A connectors, which have four pins each. Two of the pins are used for power and two for data. Figure 3-1 is an illustration of a Type A port and matching connector. Table 3-1 shows the pin assignments.

Figure 3-1 USB Type A port




Table 3-1 Pin assignments on the USB port

Pin	Signal name	Description
1	VCC	+5 VDC
2	D-	Data -
3	D+	Data +
4	GND	Ground

The computer provides 5-volt power at 500 mA for each of the two ports.

The USB ports support both low-speed and high-speed data transfers, at up to 1.5 Mbits per second and 12 Mbits per second, respectively. High-speed operation requires the use of shielded cables.

The PowerBook G4 computer comes with version 1.3 of the Macintosh USB system software, which supports all four data transfer types defined in the USB specification.

USB devices can provide a remote wakeup function for the computer. The USB root hub in the computer is set to support remote wakeup whenever a device is attached to the bus.

Booting from a USB Device

The PowerBook G4 computer can boot from a USB storage device that follows the USB Mass Storage Class specification.

Devices and Ports

Class drivers are software components that are able to communicate with many USB devices of a particular kind. If the appropriate class driver is present, any number of compliant devices can be plugged in and start working immediately without the need to install additional software. The Mac OS for the PowerBook G4 computer includes USB Mass Storage Support 2.0, a class driver that supports devices that meet the USB Mass Storage Class specification.

FireWire Port

The PowerBook G4 computer has one external FireWire IEEE 1394a port. The FireWire port

- supports serial I/O at 100, 200, and 400 Mbps (megabits per second)
- provides up to 6 watts of power when the computer system is on or when the power adapter is connected.
- supports booting the system from a mass storage device
- supports target disk mode

The FireWire hardware and software provided with the PowerBook G4 computer are capable of all asynchronous and isochronous transfers defined by IEEE standard 1394.

FireWire Connector

The FireWire connector has six contacts, as shown in Figure 3-2. The connector pin assignments are shown in Table 3-2.

Figure 3-2 FireWire connector

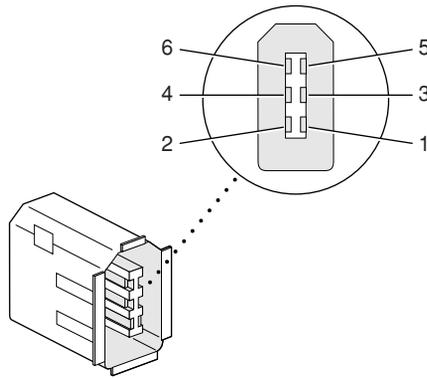


Table 3-2 Pin assignments on the FireWire connector

Pin	Signal name	Description
1	Power	Unregulated DC; 12-17 V no load
2	Ground	Ground return for power and inner cable shield
3	TPB-	Twisted-pair B, differential signals
4	TPB+	Twisted-pair B, differential signals
5	TPA-	Twisted-pair A, differential signals
6	TPA+	Twisted-pair A, differential signals
Shell	—	Outer cable shield

When the computer is on or the power adapter is connected, the power pin provides a maximum voltage of 17 V (no load) and up to 6 W power. Maximum current is 0.5 A and is controlled by an auto-resetting fuse.

Pin 2 of the 6-pin FireWire connector is ground for both power and the inner cable shield. If a 4-pin connector is used on the other end of the FireWire cable, its shell should be connected to the wire from pin 2.

Devices and Ports

The signal pairs are crossed in the cable itself so that pins 5 and 6 at one end of the cable connect with pins 3 and 4 at the other end. When transmitting, pins 3 and 4 carry data and pins 5 and 6 carry clock; when receiving, the reverse is true.

FireWire Device Programming

Developers of FireWire peripherals are required to provide device drivers. A driver for DV (digital video) is included in QuickTime.

The PowerBook G4 computer can boot from a FireWire storage device that implements SBP-2 (Serial Bus Protocol) with the RBC (reduced block commands) command set. Detailed information is available only under non-disclosure agreement; contact Developer Technical Support at dts@apple.com.

For additional information about the FireWire interface and the Apple APIs for FireWire device control, refer to the resources listed at “FireWire Interface” (page 81).

Target Disk Mode

One option at boot time is to put the computer into a mode of operation called Target Disk mode. This mode is similar to SCSI Disk mode on a PowerBook computer equipped with a SCSI port, except it uses a FireWire connection instead of a special SCSI cable.

When the PowerBook G4 computer is in Target Disk mode and connected to another Macintosh computer by a FireWire cable, the PowerBook G4 computer operates like a FireWire mass storage device with the SBP-2 (Serial Bus Protocol) standard. Target Disk mode has two primary uses:

- high-speed data transfer between computers
- diagnosis and repair of a corrupted internal hard drive

The PowerBook G4 computer can operate in Target Disk Mode as long as the other computer has a FireWire port and is running either

- Mac OS X (any version)
- Mac OS 9 with FireWire software 2.3.3 or newer

Devices and Ports

To put the computer into Target Disk mode, the user holds down the T key while the computer is starting up. When Open Firmware detects the T key during the boot process, it transfers control to special Open Firmware code.

To take the computer out of Target Disk mode, the user presses the power button.

For more information about Target Disk mode, see the section “Target Mode” in Technote 1189, The Monster Disk Driver Technote. The technote is available on the Technote website at

<http://developer.apple.com/technotes/>

Ethernet Port

The PowerBook G4 computer has a built-in Ethernet port that supports 10Base-T, 100Base-T, and 1000Base-T transfer rates. In operation, the actual speed of the link is auto-negotiated between the computer’s PHY device and the network bridge or router to which it is connected.

The connector for the Ethernet port is an RJ-45 connector on the back of the computer. Table 3-3 shows the signals and pin assignments for 10Base-T and 100Base-T operation. Table 3-4 shows the signals and pin assignments for 1000Base-T operation.

Table 3-3 Signals for 10Base-T and 100Base-T operation

Pin	Signal name	Signal definition
1	TXP	Transmit (positive lead)
2	TXN	Transmit (negative lead)
3	RXP	Receive (positive lead)
4	–	Not used
5	–	Not used

Table 3-3 Signals for 10Base-T and 100Base-T operation

Pin	Signal name	Signal definition
6	RXN	Receive (negative lead)
7	–	Not used
8	–	Not used

Table 3-4 Signals for 1000Base-T operation

Pin	Signal name	Signal definition
1	TRD+(0)	Transmit and receive data 0 (positive lead)
2	TRD–(0)	Transmit and receive data 0 (negative lead)
3	TRD+(1)	Transmit and receive data 1 (positive lead)
4	TRD+(2)	Transmit and receive data 2 (positive lead)
5	TRD–(2)	Transmit and receive data 2 (negative lead)
6	TRD–(1)	Transmit and receive data 1 (negative lead)
7	TRD+(3)	Transmit and receive data 3 (positive lead)
8	TRD–(3)	Transmit and receive data 3 (negative lead)

To interconnect two computers for 1000Base-T operation, you must use 4-pair cable (Category 5 or 6).

The Ethernet port on the PowerBook G4 computer supports Auto-MDIX: It switches between MDI (Medium Dependent Interface) and MDI-X operation automatically, so it can be connected to another device by either a straight-through cable or a cross-over cable.

The Ethernet interface in the PowerBook G4 computer conforms to the ISO/IEC 802.3 specification, where applicable, and complies with IEEE specifications 802.3i (10Base-T), 802.3u-1995 (100Base-T), and 802.3ab (1000Base-T).

Internal Modem

The PowerBook G4 computer comes with a built-in modem. The connector for the modem is an RJ-11 connector on the back of the computer.

The modem has the following features:

- modem bit rates up to 56 Kbps (supports K56flex and V.90 modem standards)
- Group 3 fax modem bit rates up to 14.4 Kbps

The modem is connected to an internal USB port and is a vendor-specific USB device. The modem driver controls the modem hardware and presents a virtual serial port to the operating system and applications. Applications that bypass the operating system's modem driver and communicate directly with the SCC will not work properly.

AirPort Card

The PowerBook G4 computer supports the AirPort Card, an internal wireless LAN module. The AirPort Card is standard on the 800-MHz model and optional on the 667-MHz model.

By communicating wirelessly with a base station, the AirPort Card can be used for internet access, email access, and file exchange. A base station provides the connection to the internet or the bridge between the wireless signals and a wired LAN or both. The AirPort Base Station has connectors for a wired LAN, a DSL or cable modem, and a standard telephone line using its built-in 56k modem.

AirPort transmits and receives data at speeds up to 11 Mbps, comparable to wired networking speeds. AirPort is Wi-Fi Certified, which means it is fully compatible with other devices that follow the IEEE 802.11b standard, including PC's. For more information about Wi-Fi and compatibility, see the reference at "[Wireless Networks](#)" (page 82).

Data Security

AirPort has several features designed to maintain the security of the user's data.

- The system uses direct-sequence spread-spectrum (DSSS) technology that uses a multi-bit spreading code that effectively scrambles the data for any receiver that lacks the corresponding code.
- The system can use a table of authentic network client ID values to verify each client's identity before granting access to the network.
- When communicating with a base station, AirPort uses up to 128-bit encryption to encode your data while it is in transit.
- The AirPort Base Station can be configured to act as a firewall, protecting your data from would-be Internet hackers.
- The AirPort Base Station can authenticate users by their unique Ethernet IDs, preventing unauthorized machines from logging into your network. Network administrators can take advantage of RADIUS compatibility, used for authenticating users over a remote server. Smaller networks can offer the same security using a local look-up table located within the base station.

AirPort Hardware

The AirPort Card is a wireless LAN module based on the IEEE 802.11 standard and using direct-sequence spread-spectrum (DSSS) technology. It is interoperable with PC-compatible wireless LANs that conform to the 802.11b standard and use DSSS.

Two AirPort antennas are built into the computer's cover, on either side of the flat-panel display. One antenna is always used for transmitting. Either of the two antennas may be used for receiving. Using a diversity technique, the AirPort Card selects the antenna that gives the best reception.

AirPort Software

Software that is provided with the AirPort Card includes

- AirPort Setup Assistant, an easy-to-use program that guides you through the steps necessary to set up the AirPort Card or set up an AirPort Base Station.

Devices and Ports

- AirPort Application, an application that allows users to switch between wireless networks and to create and join peer-to-peer networks.
- AirPort Admin Utility, a utility for advanced users and system administrators. With it the user can edit the administrative and advanced settings needed for some advanced configurations.

Hard Disk Drive

The PowerBook G4 computer has an internal hard disk drive with a storage capacity of 30, 40, or 60 GB. The drive has fluid dynamic bearings for quieter operation.

The hard disk drive uses the extended IDE (integrated drive electronics) interface, which is also referred to as the ATA interface. The implementation of the ATA interface on this computer is a subset of the ATA/ATAPI-4 specification (ANSI NCITS 317-1998 AT Attachment - 4 with Packet Interface Extension). That specification is maintained by the National Committee on Information Technology Standards (NCITS) Technical Committee T13.

The software that supports the internal hard disk is the same as that in previous PowerBook models with internal IDE drives and includes DMA support. For the latest information about that software, see Technote #1098, ATA Device Software Guide Additions and Corrections. The web page for Technote #1098 includes a link to a downloadable copy of ATA Device Software Guide.


To obtain the reference documents listed here, see the reference links at “ATA Devices” (page 80).

Hard Disk Dimensions

Figure 3-3 shows the maximum dimensions of the hard disk and the location of the mounting holes. The hard disk is the same physical size as the ones in other recent PowerBook computers: only 12.7 mm (0.5 inches) high.

The minimum clearance between any conductive components on the drive and the bottom of the mounting envelope is 0.5 mm.

Figure 3-3 Maximum dimensions of the internal hard disk

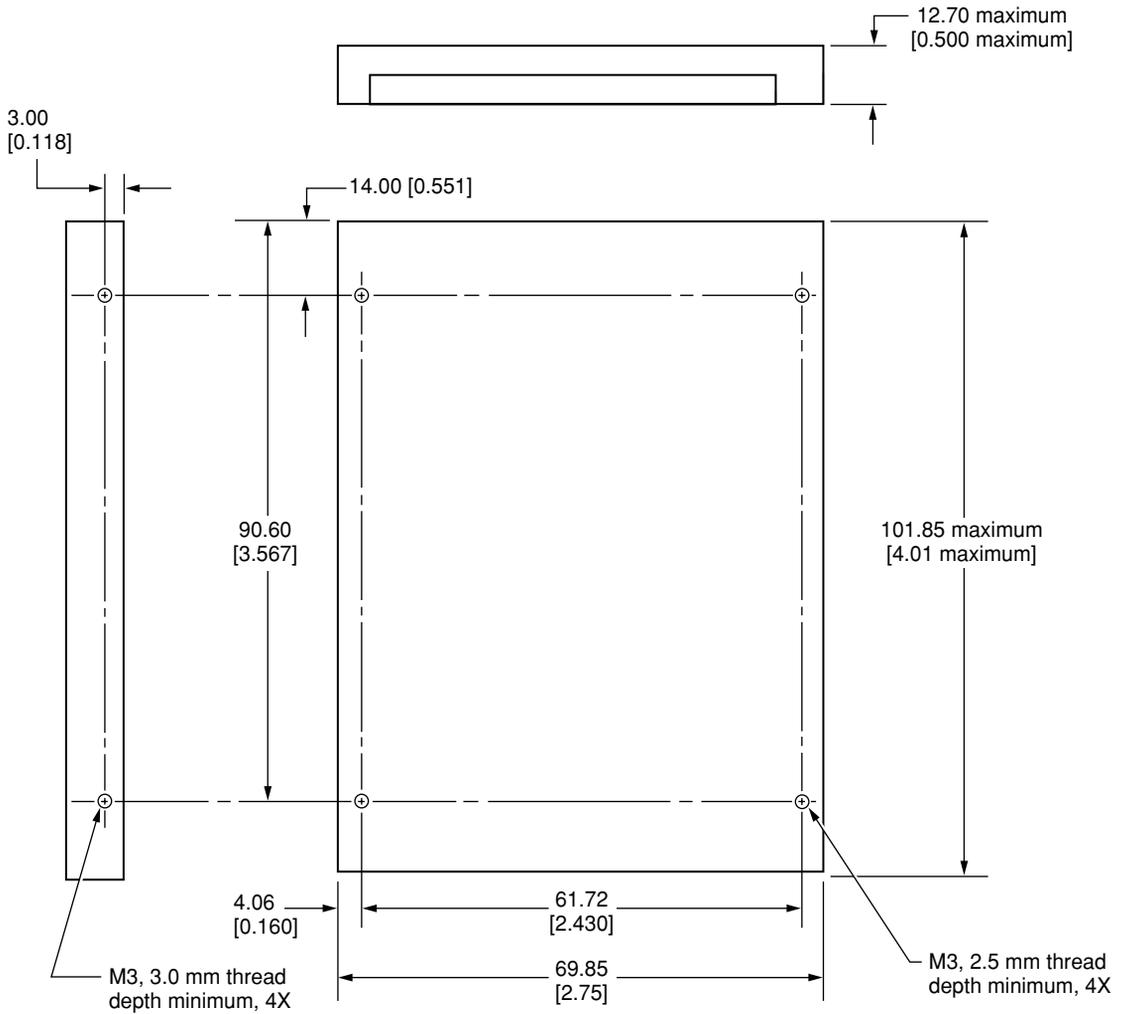


Note: Dimensions are in millimeters [inches].

Hard Disk Connector

The internal hard disk has a 48-pin connector that carries both the ATA signals and the power for the drive. The connector has the dimensions of a 50-pin connector, but with one row of pins removed, as shown in Figure 3-4. The remaining pins are in two groups: pins 1–44, which carry the signals and power, and pins 46–48, which are reserved. Pin 20 has been removed, and pin 1 is located nearest the gap, rather than at the end of the connector.

Figure 3-4 Hard disk connector and location

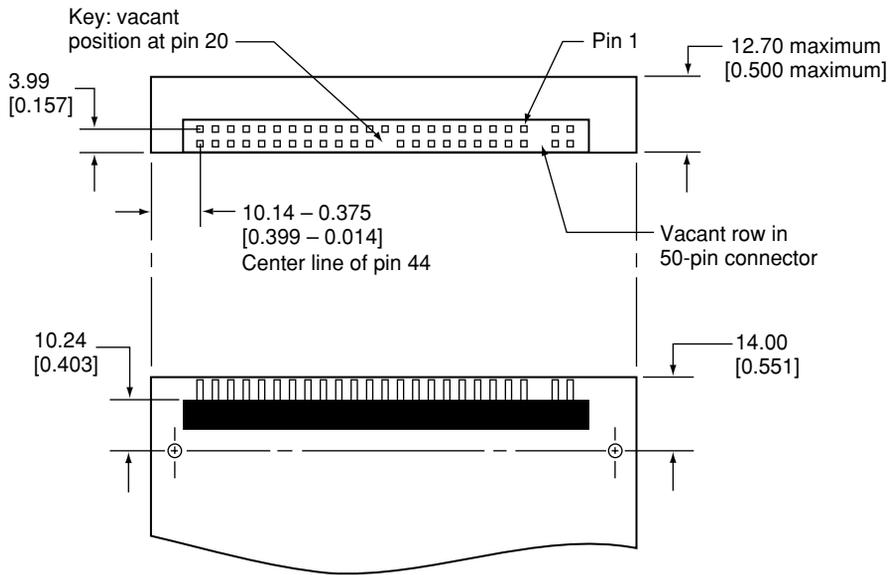

Signal Assignments

Table 3-5 shows the signal assignments on the 44-pin portion of the hard disk connector. A slash (/) at the beginning of a signal name indicates an active-low signal.

Table 3-5 Pin assignments on the ATA hard disk connector

Pin number	Signal name	Pin number	Signal name
1	/RESET	2	GROUND
3	DD7	4	DD8
5	DD6	6	DD9
7	DD5	8	DD10
9	DD4	10	DD11
11	DD3	12	DD12
13	DD2	14	DD13
15	DD1	16	DD14
17	DD0	18	DD15
19	GROUND	20	KEY
21	DMARQ	22	GROUND
23	/DIOW	24	GROUND
25	/DIOR, /HDMARDY, HSTROBE	26	GROUND
27	IORDY, /DDMARDY, DSTROBE	28	CSEL
29	/DMACK	30	GROUND
31	INTRQ	32	/IOCS16
33	DA1	34	/PDIAG, /CBLID
35	DA0	36	DA2
37	/CS0	38	/CS1

Table 3-5 Pin assignments on the ATA hard disk connector (continued)

Pin number	Signal name	Pin number	Signal name
39	/DASP	40	GROUND
41	+5V LOGIC	42	+5V MOTOR
43	GROUND	44	Reserved

CSEL, /DASP, /IOCS16, and /PDIAG are not used; see Table 3-6.

ATA Signal Descriptions

Table 3-6 describes the signals on the ATA hard disk connector.

Table 3-6 Signals on the ATA hard disk connector

Signal name	Signal description
DA(0–2)	Device address; used by the computer to select one of the registers in the ATA drive. For more information, see the descriptions of the CS0 and CS1 signals.
DD(0–15)	Data bus; buffered from IOD(16–31) of the computer’s I/O bus. DD(0–15) are used to transfer 16-bit data to and from the drive buffer. DD(8–15) are used to transfer data to and from the internal registers of the drive, with DD(0–7) driven high when writing.
/CBLID	The host checks this signal after Power On or hardware reset to detect whether an 80-conductor cable is present.
/CS0	Register select signal. It is asserted low to select the main task file registers. The task file registers indicate the command, the sector address, and the sector count.
/CS1	Register select signal. It is asserted low to select the additional control and status registers on the ATA drive.
CSEL	Cable select; not available on this computer (n.c.).
/DASP	Device active or slave present; not available on this computer (n.c.).

Table 3-6 Signals on the ATA hard disk connector (continued)

Signal name	Signal description
/DDMARDY	Drive ready to receive Ultra DMA data.
/DIOR	I/O data read strobe.
/DIOW	I/O data write strobe.
/DMACK	Used by the host to initiate a DMA transfer in response to DMARQ.
DSTROBE	Strobe for Ultra DMA data transfers to host.
/HDMARDY	Ultra DMA data ready.
HSTROBE	Strobe for Ultra DMA data transfers from host.
IORDY	I/O ready; when driven low by the drive, signals the CPU to insert wait states into the I/O read or write cycles.
/IOCS16	I/O channel select; not used on this computer.
DMARQ	Asserted by the device when it is ready to transfer data to or from the host.
INTRQ	Interrupt request. This active high signal is used to inform the computer that a data transfer is requested or that a command has terminated.
/PDIAG	Asserted by device 1 to indicate to device 0 that it has completed the power-on diagnostics; not available on this computer (n.c.).
/RESET	Hardware reset to the drive; an active low signal.
Key	This pin is the key for the connector.

The built-in ATA devices are connected to the I/O bus through bidirectional bus buffers.

DVD-ROM/CD-RW Combo Drive

The computer has a slot-loading DVD-ROM/CD-RW Combo drive. The drive can read DVD media and read and write CD media, as shown in Table 3-7. The DVD-ROM/CD-RW drive also provides DVD-Video playback with DVD MPEG2 decode.

Table 3-7 Types of media read and written by the DVD-ROM/CD-RW drive

Media type	Reading speed	Writing speed
DVD-ROM	8x (CAV)	–
CD-R	24x (CAV)	8x (CLV)
CD-RW	24x (CAV)	8x (CLV)
CD or CD-ROM	24x (CAV)	–

Important

The DVD-ROM-CD-RW drive supports only 12-cm disc media. It does not support 8-cm discs or non-circular media.

Digital audio signals from the DVD-ROM/CD-RW Combo drive can be played through the sound outputs under the control of the Sound Manager.

The DVD-ROM/CD-RW Combo drive is an ATAPI drive and is device-select jumpered as Device 1 (slave) in an ATA Device 0/1 configuration.

Trackpad

The pointing device in the PowerBook G4 computer is a trackpad. The trackpad is a solid-state device that emulates a mouse by sensing the motions of the user's finger over its surface and translating those motions into ADB commands.

The user makes selections either by pressing the trackpad button (below the trackpad) or by tapping and double tapping on the pad itself. The trackpad responds to one or two taps on the pad itself as one or two clicks of the button. The user can tap and drag on the trackpad in much the same manner as clicking and dragging with the mouse. The tap and double tap functions are optional; the user activates or deactivates them by means of the Trackpad control panel.

Keyboard

The keyboard is a compact, low-profile design with a row of function keys and inverted-T cursor motion keys.

Removing the Keyboard

The keyboard is removable to allow access to the internal components and expansion connectors inside the computer. The keyboard is held in place by a locking screw and two latches.

To unlock the keyboard, the user turns a slotted screw that is part of the Num Lock LED, which is between the F5 and F6 function keys. Turning the screw 180° locks or unlocks the keyboard.

Note: The PowerBook G4 computer leaves the factory with keyboard locking screw in the unlocked position.

Devices and Ports

The two latches are between the ESC key and the F1 key and between the F11 and F12 keys. The user can release the latches by pulling them toward the front of the computer.

Changing the Operation of the Keyboard

Several of the keys on the keyboard have more than one mode of operation.

- Function keys F1–F7 can also control the display brightness, the speaker volume, the dual display feature, and the Num Lock function; function key F12 is also the media eject key.
- Certain control keys can be used as page-control keys.
- The keys on the right side of the keyboard can be used as a numeric keypad.

The next sections describe these groups of keys and the way their alternate modes of operation are selected by using the Fn key, the Num Lock key, and the Function Keys checkbox in the Keyboard control panel.

Keyboard Illustrations

Figure 3-5 shows the actual appearance of the keyboard. Figure 3-6 shows the alternate modes of operation of the function and control keys. Figure 3-7 shows the embedded numeric keypad.

CHAPTER 3

Devices and Ports

Figure 3-5 Keyboard layout



Figure 3-6 and Figure 3-7 include duplicate versions of some keys in order to show their alternate modes of operation. In some cases, the alternate key captions shown in the figures do not appear on the keyboard. For the actual appearance of the keyboard, refer to Figure 3-5.

Figure 3-6 Alternate operations of function and control keys


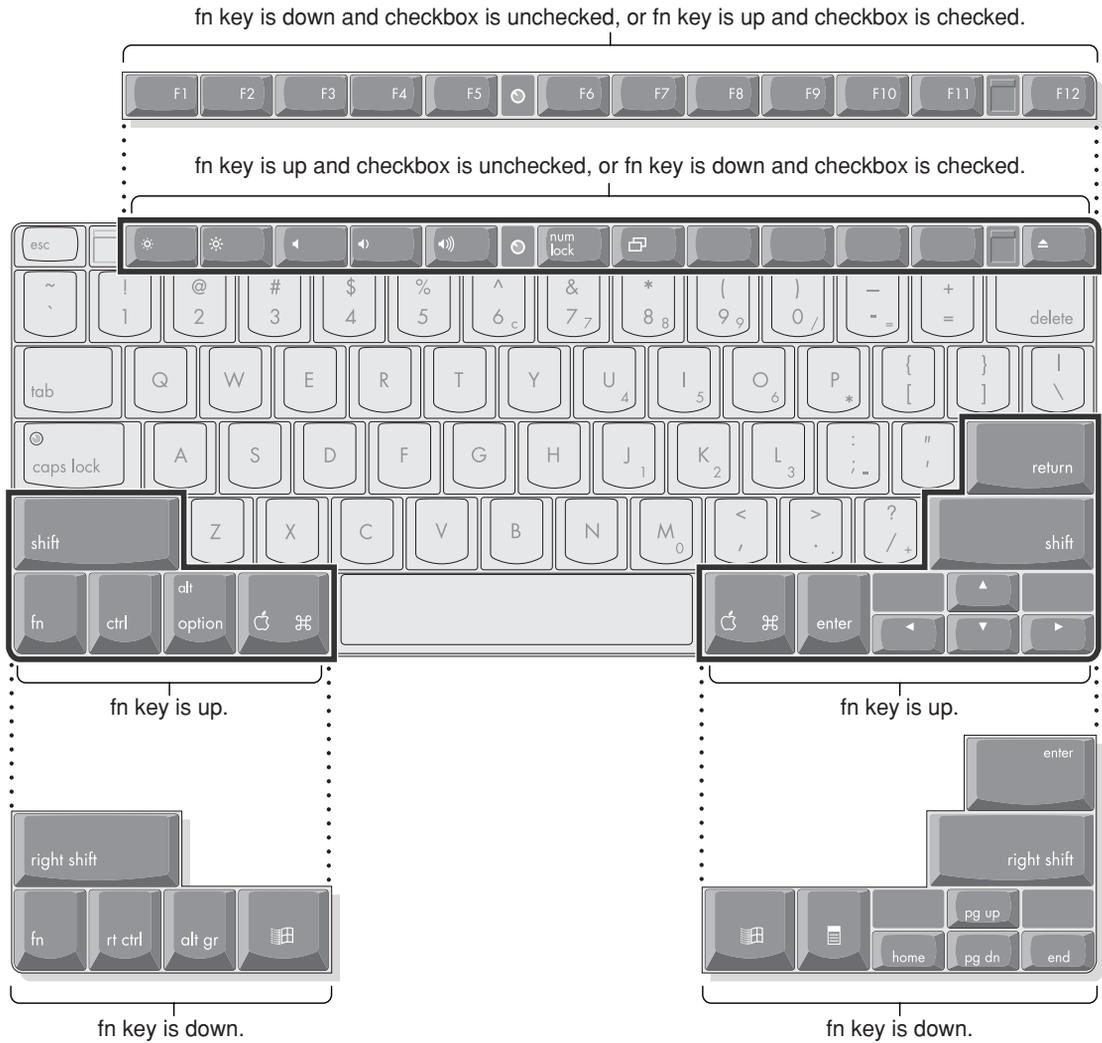


Figure 3-7 Embedded numeric keypad operation

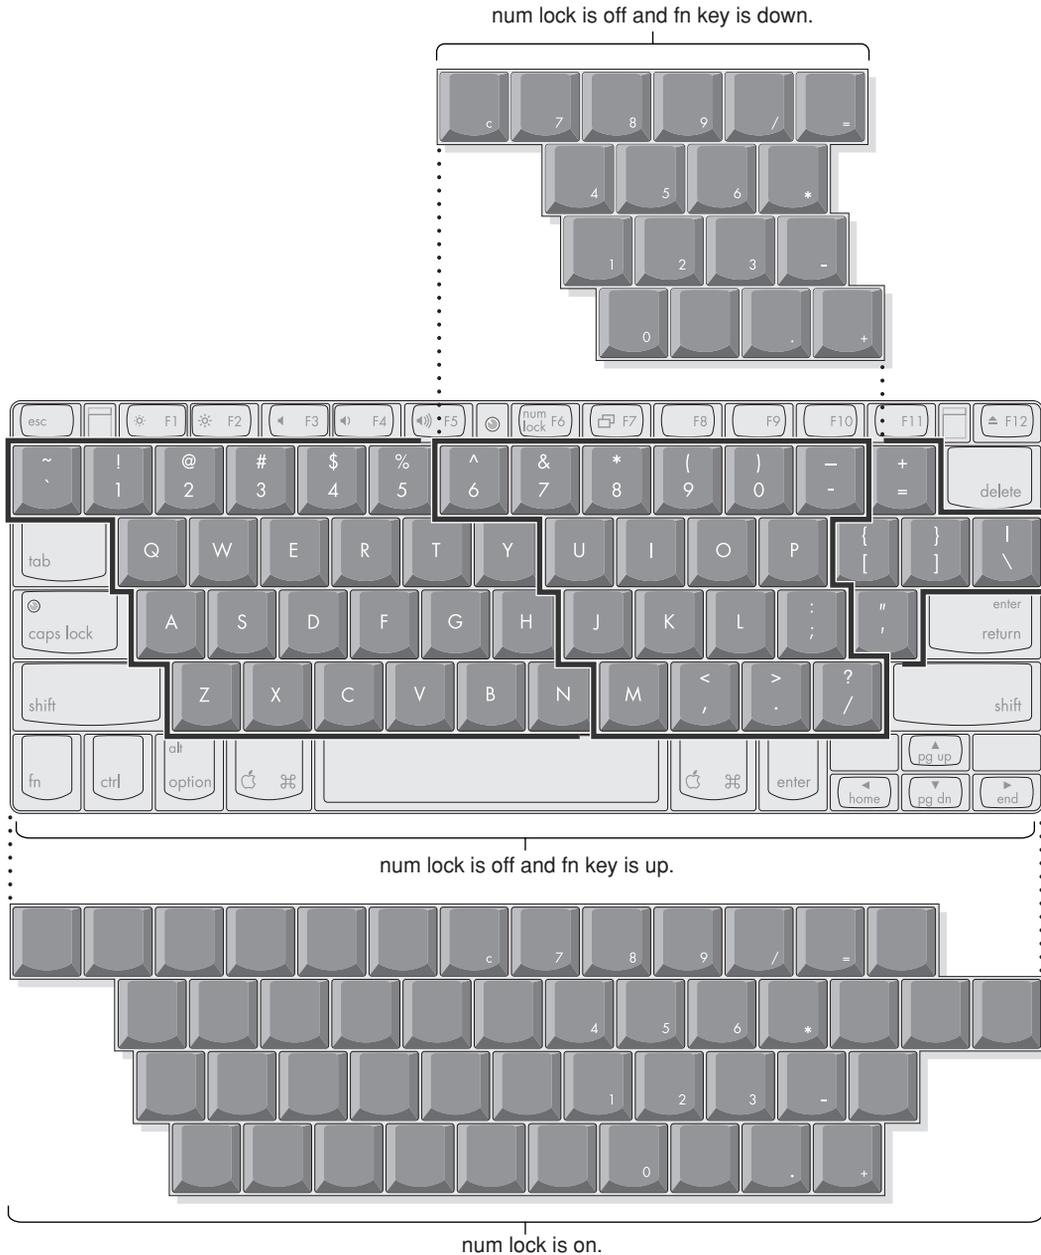

Using the Fn Key

Pressing the Fn key affects three sets of keys: the function keys F1–F12, the embedded numeric keypad, and certain modifier keys.

- It toggles the function keys between their control-button operation and their F1–F12 functions, as shown in Table 3-8 and Figure 3-6. The user selects the default modes of operation of those keys as described in the section “The Function-Keys Checkbox” (page 52).
- It selects the embedded numeric keypad on the right portion of the alphanumeric keys, as shown in Table 3-10 and Figure 3-7.
- It changes certain control keys, including the cursor control keys, to page control keys, as shown in Table 3-11 and Figure 3-7.

Using the Num Lock Key

Pressing the Num Lock key affects two sets of keys: the embedded keypad and the rest of the alphanumeric keys.

- It selects the embedded numeric keypad, as shown in Table 3-10 and Figure 3-7.
- It makes the rest of the alphanumeric keys functionless (NOPs), as shown in Figure 3-7.

The Function-Keys Checkbox

The Fn key lets the user switch the mode of operation of the function keys at any time. The user selects the default mode of the function keys by means of the Function-keys checkbox in the Keyboard Control Panel.

The Function-keys checkbox lets the user choose whether the function key operations are primary or secondary. “Function keys primary” means the function keys are normally in their F1–F12 mode of operation and pressing the Fn key selects their control-button mode. “Function keys secondary” means the function keys are normally in their control-button mode and pressing the Fn key selects their function-key mode.

Devices and Ports

In other words, pressing the Fn key reverses the mode of operation of the function keys from the default mode set by the checkbox. Table 3-8 summarizes the checkbox settings and the operation of the Fn key. The operations of the individual function keys are shown in Table 3-9 and Figure 3-6. ▸

Table 3-8 Setting the default behavior of the function keys

Make Function Keys Primary checkbox	Operations of function keys	
	Fn key up	Fn key down
Checked	F1–F12 functions	Control buttons
Not checked	Control buttons	F1–F12 functions

Table 3-9 The function keys as control buttons

Key name	Control button
F1	Decrease display brightness
F2	Increase display brightness
F3	Mute the speaker
F4	Decrease speaker volume
F5	Increase speaker volume
F6	Num Lock
F7	Switch between dual display and mirroring
F12	Media eject

The Embedded Keypad

A certain group of alphanumeric keys can also function as an embedded keypad. The user selects this mode by using the Fn key or the Num Lock key. Figure 3-7 shows the keys making up the embedded keypad and Table 3-10 lists them.

Table 3-10 Embedded keypad keys

Key name	Keypad function	Key name	Keypad function
6	Clear	P	* (multiply)
7	7	J	1
8	8	K	2
9	9	L	3
0	/ (divide)	;	- (subtract)
-	= (equals)	M	0
U	4	,	NOP
I	5	.	. (decimal)
O	6	/	+ (add)

When the embedded keypad is made active by the Num Lock key, the other alphanumeric keys have no operation (NOP), as shown in Figure 3-7. The affected keys include certain special character keys: plus and equal sign, right and left brackets, vertical bar and backslash, and straight apostrophe.

Other Control Keys

The cursor control keys can also be used as page control keys. Other control keys can take on the functions of certain keys on a PC keyboard, for use with PC emulation software. The Fn key controls the modes of operation of this group of keys. Table 3-11 is a list of these keys and their alternate functions. These control keys are also show in Figure 3-7.

Table 3-11 Control keys that change

Key name	Alternate function
Shift	Right shift key
Control	Right control key
Option	Alt gr (right Alt key)
Command	Windows® key
Enter	Menu key (for contextual menus)
Left arrow	Home
Up arrow	Page up
Down arrow	Page down
Right arrow	End

Flat Panel Display

The PowerBook G4 computer has a built-in color flat panel display. It is a wide-screen display (1280 by 854 pixels) and is 15.2 inches across, measured diagonally. The resolution is 101.4 dpi.

The display is backlit by a cold cathode fluorescent lamp (CCFL). The display uses TFT (thin-film transistor) technology for high contrast and fast response.

Devices and Ports

In addition to its native resolution (1280 by 854) the display also supports several non-native resolutions, as shown in Table 3-12. The graphics controller IC includes a scaling function that expands displays with those smaller resolutions to fill the screen.

The display's native resolution, 1280 by 854, has an aspect ratio of 3:2. When selecting a picture resolution with an aspect ration of 4:3, the user can choose to have it displayed with square pixels and black margins on the sides, or with stretched pixels that fill the display from side to side. These options are shown in Table 3-12.

Table 3-12 Picture sizes on the flat panel display

Picture resolution	Display area used	Black margins	Shape of pixels
640 by 480	1024 by 768	yes	square
640 by 480	1280 by 854	no	stretched
720 by 480	1280 by 854	no	square
800 by 600	1024 by 768	yes	square
800 by 600	1280 by 854	no	stretched
896 by 600	1280 by 854	no	square
1024 by 768	1024 by 768	yes	square
1024 by 768	1280 by 854	no	stretched
1152 by 768	1280 by 854	no	square

External Monitors

The computer has a DVI-I connector for an Apple digital display, an external video monitor, or a projection device. The DVI-I connector that supports all DVI-equipped displays. A DVI-to-VGA adapter for use with analog monitors is included. With the Hydra adapter, available separately, the PowerBook G4 computer can be used with any digital Apple monitor that has an ADC connector.

The computer also has an S-video connector that supplies a video signal for an NTSC or PAL video monitor or VCR. See “[External Video Port](#)” (page 61).

Dual Display and Mirror Mode

An external monitor or projection device connected to the computer can increase the amount of visible desktop space. This way of using an external monitor is called dual display to distinguish it from mirror mode, which shows the same information on both the external display and the built-in display.

When the internal display and an external monitor are both operating and mirror mode is selected, the scaling function is not available. Both displays show full-sized images only when the display resolution for the external monitor is set to the internal display’s native resolution: 1280 by 854. Both displays can operate with other resolution settings, but in mirror mode, one of them will have a display that is smaller than the full screen and has a black border around it. With the resolution for the external monitor set to 640 by 480 or 800 by 600, the image on the internal display is smaller than its screen. For resolution settings larger than 1280 by 854, the image on the external monitor is smaller than its screen.

Analog Monitor Resolutions

The PowerBook G4 computer comes with an adapter for use with an analog video monitor. Table 3-13 lists the picture sizes and frame rates supported.

Table 3-13 Picture sizes on an analog monitor

Picture size (pixels)	Frame rate	Pixel depth	Picture size (pixels)	Frame rate	Pixel depth
512 by 384	60 Hz	24 bpp	1024 by 768	72 Hz	24 bpp
640 by 480	60 Hz	24 bpp	1024 by 768	75 Hz	24 bpp
640 by 480	67 Hz	24 bpp	1024 by 768	85 Hz	24 bpp
640 by 480	72 Hz	24 bpp	1152 by 870	75 Hz	24 bpp
640 by 480	75 Hz	24 bpp	1280 by 960	75 Hz	24 bpp
640 by 480	85 Hz	24 bpp	1280 by 1024	60 Hz	24 bpp
640 by 870	75 Hz	24 bpp	1280 by 1024	75 Hz	24 bpp
800 by 600	56 Hz	24 bpp	1600 by 1200	60 Hz	24 bpp
800 by 600	60 Hz	24 bpp	1600 by 1200	65 Hz	24 bpp
800 by 600	72 Hz	24 bpp	1600 by 1200	70 Hz	24 bpp
800 by 600	75 Hz	24 bpp	1600 by 1200	75 Hz	24 bpp
800 by 600	85 Hz	24 bpp	1792 by 1344	60 Hz	24 bpp
832 by 624	75 Hz	24 bpp	1856 by 1392	60 Hz	24 bpp
1024 by 768	60 Hz	24 bpp	1920 by 1440	75 Hz	24 bpp
1024 by 768	70 Hz	24 bpp	2048 by 1536	75 Hz	24 bpp

When the flat panel display and an external video monitor are operating at the same time, the system allocates 16 MB of video memory for each, enough to support the full 24-bit pixel depth at resolutions up to 2048 by 1536 pixels.

Digital Display Resolutions

Table 3-14 (page 59) shows the resolutions supported on flat-panel (digital) displays. The 32 MB of video RAM on the accelerated graphics card supports pixel depths up to 32 bits per pixel at all resolutions.

Table 3-14 Picture sizes on a digital display

640 by 480	1024 by 768
800 by 500	1280 by 800
800 by 512	1280 by 1024
800 by 600	1344 by 840
960 by 600	1600 by 1024
1024 by 600	1600 by 1200
1024 by 640	1920 by 1200

DVI-I Connector

The external monitor connector is a DVI-I connector. It carries both digital and analog video signals. Figure 3-8 (page 59) shows the contact configuration; Table 3-15 (page 60) and Table 3-16 (page 60) list the signals and pin assignments.

Figure 3-8 DVI-I connector

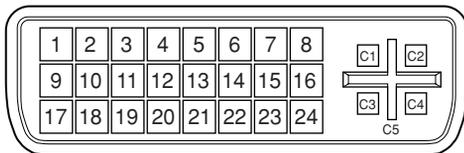


Table 3-15 Main signals on the DVI-I connector

Pin	Signal name	Pin	Signal name
1	TMDS Data2-	13	TMDS Data3+
2	TMDS Data2+	14	+5V Power
3	TMDS Data2/4 Shield	15	Ground for +5V Power
4	TMDS Data4-	16	Hot Plug Detect
5	TMDS Data4+	17	TMDS Data0-
6	DDC Clock	18	TMDS Data0+
7	DDC Data	19	TMDS Data0/5 Shield
8	Analog Vertical Sync	20	TMDS Data5-
9	TMDS Data1-	21	TMDS Data5+
10	TMDS Data1+	22	TMDS Clock Shield
11	TMDS Data1/3 Shield	23	TMDS Clock+
12	TMDS Data3-	24	TMDS Clock-

Table 3-16 MicroCross signals on the DVI-I connector

Pin	Signal name
C1	Analog Red Video
C2	Analog Green Video
C3	Analog Blue Video
C4	Analog Horizontal Sync
C5	Analog Common Ground Return

Devices and Ports

The graphics data sent to the digital monitor use transition minimized differential signaling (TMDS). TMDS uses an encoding algorithm to convert bytes of graphics data into characters that are transition-minimized to reduce EMI with copper cables, and DC-balanced for transmission over fiber optic cables. The TMDS algorithm also provides robust clock recovery for greater skew tolerance with longer cables or low cost short cables. For additional information about TMDS, see the references shown in “Digital Visual Interface” (page 81).

External Video Port

The PowerBook G4 computer has a video port that provides S-video output to a PAL or NTSC video monitor or VCR. The video output connector is a 7-pin S-video connector. Figure 3-9 shows the arrangement of the pins and Table 3-17 shows the pin assignments on the S-video connector.

Figure 3-9 S-video connector




Table 3-17 Pin assignments for the S-video output connector

Pin number	S-video output connector
1	Analog GND
2	Analog GND
3	Video Y (luminance)

Table 3-17 Pin assignments for the S-video output connector

Pin number	S-video output connector
4	Video C (chroma)
5	composite video
6	Unused
7	Unused

An adapter (included) can be plugged into the S-video connector and accepts an RCA plug for connecting a composite video monitor.

The PowerBook G4 computer provides video output at picture sizes and frame rates compatible with the NTSC and PAL standards; the picture sizes are listed in Table 3-18. Those picture resolutions produce underscanned displays on standard monitors.

Table 3-18 Picture sizes for S-video output

Picture size	Pixel depth
512 by 384	24 bpp
640 by 480	24 bpp
720 by 480 (NTSC only)	24 bpp
720 by 576 (PAL only)	24 bpp
800 by 600	24 bpp
832 by 624	24 bpp
1024 by 768	24 bpp

Sound System

The sound system for the PowerBook G4 computer supports stereo sound output and input, available simultaneously. The sound circuitry handles audio data as 16-bit samples at a 48 kHz sample rate.

The sound circuitry and system software can create sounds digitally and either play the sounds through the built-in speakers or send the sound signals out through the sound output jack or one of the USB ports.

The PowerBook G4 computer can record sound data from either the built-in microphone, an audio CD, the audio input jack, or a USB audio device. For each sound input source, sound playthrough can be enabled or disabled. Sound data from digital sources is converted to analog form for output to the speakers and the sound output jack.

Sound Inputs

The sound system accepts inputs from five possible sources:

- the built-in microphone
- the audio input jack
- a CD or DVD in the DVD-ROM/CD-RW drive
- a digital audio device connected to a USB or FireWire port
- sound signals from the communication (modem) slot

The microphone preamp has a dedicated analog input channel in the Snapper circuitry; the other inputs send digital data. The analog input can be set for play-through or recording. The digital inputs can be selected or mixed by the Snapper sound circuitry.

The computer also accepts digital sound data from the DVD-ROM/CD-RW Combo drive or from devices connected to the USB or FireWire ports. Sound data from those sources can be sent to the sound system to be converted to analog form for output to the speakers and the output jack.

Built-in Microphone

The built-in microphone is located at the bottom of the left speaker grille.

The sound signal from the built-in microphone goes through a dedicated preamplifier that raises its nominal 30-mV level to a nominal 150 mV (peak-to-peak) signal to the sound circuitry. That signal level assures good quality digitizing without driving the analog input into clipping.

Audio Input Jack

The audio input jack is a 3.5-mm mini phone jack located on the I/O panel on the back of the computer. The audio input jack accepts line-level stereo signals. It also accepts a stereo miniplug-to-RCA cable adapter for connecting stereo equipment to the computer.

The sound input jack signal connections are:

- tip: audio left channel
- ring: audio right channel
- sleeve: audio ground

Modem Activity Sound Signals

Modem activity sound signals from the communications slot are sent to the Snapper sound circuitry as 8-bit digital data.

Sound Outputs

The sound system sends sound output signals to the built-in speakers and the external sound output jack.

Headphone Jack

The headphone jack is located on the left side of the computer. The headphone jack provides enough current to drive a pair of low-impedance headphones. It can also be used as a line-level output.

The headphone jack has the following electrical characteristics:

Devices and Ports

- impedance suitable for driving standard 32-ohm headphones
- output level 2.0 V peak-to-peak (0.7 V RMS)
- signal-to-noise (SNR) 90 dB unweighted (typical)
- total harmonic distortion (THD) 0.03% or less

Internal Speakers

The computer has two internal speakers, one on either side of the keyboard. The computer turns off the sound signals to the speakers when an external device is connected to the sound output jack and during power cycling.

Digitizing Sound

The sound circuitry digitizes and records sound as 48-kHz 16-bit samples. If a sound sampled at a lower rate on another computer is played as output, the Sound Manager transparently upsamples the sound to 48 kHz prior to outputting the audio to the sound circuitry.

When recording sound from a microphone, applications that may be affected by feedback should disable sound playthrough by calling the Sound Manager APIs.

C H A P T E R 3

Devices and Ports

Expansion Features

This chapter describes the expansion features of the PowerBook G4 computer: the RAM expansion slots and the CardBus slot.

RAM Expansion Slots

The computer has two RAM expansion slots that accommodate standard SO (small outline) DIMMs using SDRAM devices. One or both slots may be occupied by factory-installed SO-DIMMs. The slots are accessible for user installation of an additional or larger SO-DIMM.

RAM expansion SO-DIMMs for both models must be PC133 compliant.

The SO-DIMMs must use SDRAM devices. If the user installs an SO-DIMM that uses EDO devices, the boot process will fail when the user attempts to restart the computer and the computer will not operate.

The address logic for the RAM slots supports up to 1 GB total RAM. Using the highest-density devices currently available, an SO-DIMM can contain up to 512 MB of RAM, so the two RAM expansion slots can accommodate up to 1 GB total RAM.

Getting Access to the Slots

The RAM expansion slots are stacked in a dual socket on the main logic board. The user can get access to the slots by removing the keyboard, as shown in Figure 4-1.

The keyboard is held in place by a locking screw and two latches.


Expansion Features

The keyboard locking screw is a slotted screw that is part of the Num Lock LED, which is located between the F5 and F6 function keys. The locking screw can be turned through 360°; turning it 180° switches between the locked and unlocked positions. The computer is shipped with the locking screw in the unlocked position.

The two latches are between the ESC key and the F1 key and between the F11 and F12 keys. You release the latches by pulling them toward the front of the computer.

Pulling only on the latches (not on the keys), and without disconnecting the keyboard's membrane cable, you can lift the keyboard up and turn it face down onto the front part of the case.

Figure 4-1 Interior view showing RAM expansion slots

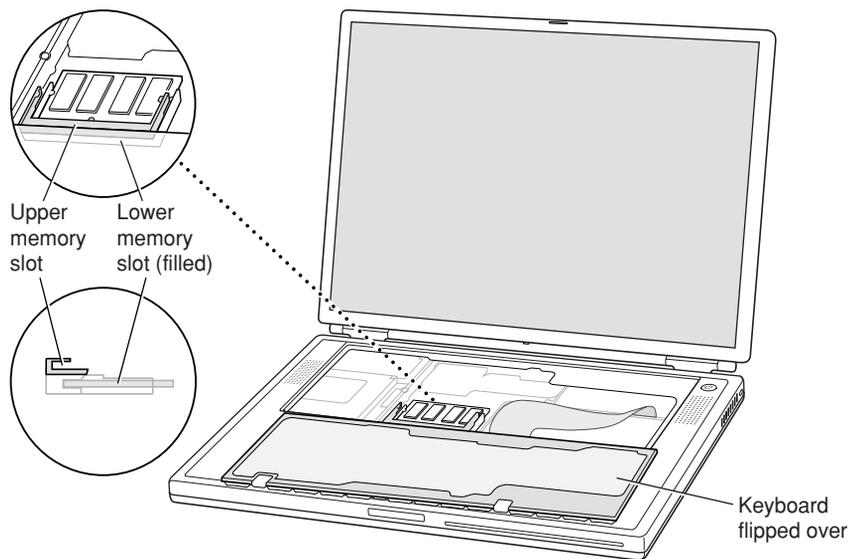**Important**

Use care when inserting or removing a DIMM. Pay particular attention to the retaining tabs on either side of the slot. Make sure to release the tabs before removing a DIMM. When installing a DIMM, make sure the tabs are engaged before closing up the computer.

Mechanical Design of RAM SO-DIMMs

The RAM expansion modules used in the PowerBook G4 computer are standard 144-pin 8-byte DRAM SO-DIMMs, as defined in the JEDEC specifications.

The mechanical characteristics of the RAM expansion SO-DIMM are given in the JEDEC specification for the 144-pin 8-byte DRAM SO-DIMM. The specification number is JEDEC MO-190-C. To obtain a copy of the specification, see the references listed at “RAM Expansion Modules” (page 79).

The specification defines SO-DIMMs with nominal heights of 1.0, 1.25, 1.5, and 2.0 inches. The PowerBook G4 computer can accommodate SO-DIMMs with heights of 1.25 inches or less.

Important

The PowerBook G4 computer will not accept a 1.5 or 2-inch SO-DIMM.

The JEDEC specification defines the maximum depth or thickness of an SO-DIMM as 3.8 mm. That specification is also a maximum: Modules that exceed the specified thickness can cause reliability problems.

Electrical Design of RAM SO-DIMMs

SO-DIMMs for PowerBook G4 computer are required to be PC133 compliant. For information about the PC133 specifications, see the references at “RAM Expansion Modules” (page 79).

The electrical characteristics of the RAM SO-DIMM are given in section 4.5.6 of the JEDEC Standard 21-C, release 7. To obtain a copy of the specification, see the references listed at “RAM Expansion Modules” (page 79).

The JEDEC and Intel specifications define several attributes of the DIMM, including storage capacity and configuration, connector pin assignments, and electrical loading. The specifications support SO-DIMMs with either one or two banks of memory.

Important

The memory controller on the PowerBook G4 computer uses a separate CKE signals for each bank, as called out in the JEDEC specification. SO-DIMMs that have all the CKE pins connected together will not operate properly.

Expansion Features

The JEDEC specification for the SO-DIMM defines a Serial Presence Detect (SPD) feature that contains the attributes of the module. SO-DIMMs for use in PowerBook computers are required to have the SPD feature. Information about the required values to be stored in the presence detect EEPROM is in section 4.1.2.5 and Figure 4.5.6-C (144 Pin SDRAM SO-DIMM, PD INFORMATION) of the JEDEC standard 21-C specification, release 7.

Important

For a DIMM to be recognized by the startup software, the Serial Presence Detect (SPD) feature must be programmed properly to indicate the timing modes supported by the DIMM.

Capacitance of the data lines must be kept to a minimum. Individual DRAM devices should have a pin capacitance of not more than 5 pF on each data pin.

SDRAM Devices

The SDRAM devices used in the RAM expansion modules must be self-refresh type devices for operation from a 3.3-V power supply. The speed of the SDRAM devices must be 133 MHz or higher.

The devices are programmed to operate with a CAS latency of 3. At that CAS latency, the access time from the clock transition must be 5.4 ns or less. The burst length must be at least 4 and the minimum clock delay for back-to-back random column access cycles must be a latency of 1 clock cycle.

When the computer is in Sleep mode, the RAM modules are in self-refresh mode and the maximum power-supply current available for each RAM module is 8 mA (see the section “[RAM SO-DIMM Electrical Limits](#)” (page 72)). Developers should specify SDRAM devices with low power specifications so as to stay within that limit.

Expansion Features

Configuration of RAM SO-DIMMs

Table 4-1 shows information about the different sizes of SDRAM devices used in the memory modules. The first two columns show the memory size and configuration of the SO-DIMMs. The next two columns show the number and configuration of the SDRAM devices making up the memory modules.

Table 4-1 Sizes of RAM expansion modules and devices

SO-DIMM size	SO-DIMM configuration	Number of devices	Device configuration	Number of banks
128 MB	16 M x 64	8	16 M x 8	1
128 MB	16 M x 64	8	8 M x 16	2
256 MB	32 M x 64	16	16 M x 8	2
256 MB	32 M x 64	8	32 M x 8	1
256 MB	32 M x 64	8	16 M x 16	2
512 MB	64 M x 64	16	32 M x 8	2

Note: The PowerBook G4 computer does not use memory interleaving, so installing two SO-DIMMs of the same size does not result in any performance gain.

Address Multiplexing

Signals A[0] – A[12] and BA[0] – BA[1] on each RAM SO-DIMM make up a 15-bit multiplexed address bus that can support several different types of SDRAM devices. Table 4-2 lists the types of devices that can be used in the PowerBook G4 computer by size, configuration, and sizes of row, column, and bank addresses.

Expansion Features

Important

The PowerBook G4 computer supports only the types of SDRAM devices specified in Table 4-2. Other types of devices should not be used with this computer.

Table 4-2 Types of DRAM devices

Device size	Device configuration	Row address bits	Column address bits
64 Mbits	2 M x 8 x 4	12	9
64 Mbits	1 M x 16 x 4	12	8
64 Mbits	512 K x 32 x 4	11	8
128 Mbits	4 M x 8 x 4	12	10
128 Mbits	2 M x 16 x 4	12	9
128 Mbits	1 M x 32 x 4	12	8
256 Mbits	8 M x 8 x 4	13	10
256 Mbits	4 M x 16 x 4	13	9

RAM SO-DIMM Electrical Limits

Each RAM SO-DIMM must not exceed the following maximum current limits on the +3.3 V supply:

Active: 1.2 A (8 devices at 150 mA each)

Sleep: 12 mA

Important

The restriction on sleep current is required not only to maximize the battery life but to meet the limitations of the backup battery during sleep swapping of the main battery. Developers of RAM expansion modules that exceed the limit on sleep current must include a warning to the user that battery sleep swapping may not work with those modules installed.

Expansion Features

The maximum current specified for active operation generally rules out the use of 4-bit-wide SDRAM devices in a RAM expansion module. Such a module would have 16 such devices, and the 1.2 A maximum current would allow only about 75 mA per device. To stay within the current limits, RAM expansion modules should use only 8-bit or 16-bit SDRAM devices.

CardBus Slot

The CardBus slot accepts one Type I or Type II card. The slot supports both 16-bit PC Cards and 32-bit CardBus Cards. The card can be removed and replaced while the computer is operating.

Note: The CardBus slot does not provide 12-V power.

For information about the CardBus and the PC Card Manager, refer to the CardBus DDK and the PC Card Manager SDK. To obtain the DDK and the SDK, see the reference at “PC Card Manager” (page 79).

Important

As noted in the user manual, the AirPort Card does not work in the CardBus slot.

C H A P T E R 4

Expansion Features

Supplemental Reference Documents

For more information about the technologies mentioned in this developer note, you may wish to consult some of the following references.

For information about older models of Macintosh computers, refer to the developer notes archive at

<http://developer.apple.com/techpubs/hardware/hardware2.html>.

You should also have copies of the relevant books describing the system software for Macintosh computers available in technical bookstores and on the World Wide Web at

<http://developer.apple.com/techpubs/macos8/mac8.html>

Apple Technotes

Apple Technotes answer many specific questions about the operation of Macintosh computers and the Mac OS. The technotes are available on the Technote website at

<http://developer.apple.com/technotes/>

3D Graphics

Developers of 3D graphics for games should know about OpenGL for Macintosh®, a new version of SGI's application programming interface (API) and software library for 3D graphics.

Information is available on the World Wide Web at

<http://www.apple.com/opengl>

Developer support and documentation is available at

<http://developer.apple.com/opengl/>

PowerPC G4 Microprocessor

Information about the PowerPC G4 microprocessor is available on the World Wide Web at

<http://e-www.motorola.com/webapp/sps/site/taxonomy.jsp?nodeId=01M98653>

Velocity Engine (AltiVec)

Velocity Engine is Apple's name for the AltiVec vector processor in the PowerPC G4 microprocessor. Apple provides support for developers who are starting to use the Velocity Engine in their applications. Documentation, development tools, and sample code are now available on the World Wide Web, at

<http://developer.apple.com/hardware/ve/index.html>

Supplemental Reference Documents

AltiVec Technology Programming Environments Manual (AltiVec PEM) is a reference guide for programmers. It contains a description for each instruction and information to help in understanding how the instruction works. You can obtain a copy of the AltiVec PEM through the Motorola AltiVec site on the World Wide Web, at

<http://www.mot.com/SPS/RISC/smartnetworks/arch/powerpc/features/altivec/avindex.htm>

Mac OS X

For access to Apple's developer documentation for Mac OS X, see the website at

<http://developer.apple.com/techpubs/macosx/macosx.html>

Two introductory books are available: *Mac OS X: An Overview for Developers*, and *Inside Mac OS X: System Overview*. Both are available on the Mac OS X website at

<http://developer.apple.com/macosx/gettingstarted/>

O'Reilly & Associates publishes a series of books about Mac OS X development. The books in this series have been technically reviewed by Apple engineers and are recommended by the Apple Developer Connection. The first Mac OS X titles, *Learning Carbon* and *Learning Cocoa*, are available now. In addition to the book series, the O'Reilly Network provides news and articles for Macintosh Developers on the World Wide Web at

<http://www.oreillynet.com/mac>

I/O Kit

The I/O Kit is part of Darwin, the operating system foundation for Mac OS X. The documentation for I/O Kit is available on Apple's Darwin website at

<http://developer.apple.com/techpubs/macosx/Darwin/index.html>

Mac OS 9

For a description of Mac OS 9.2, developers should refer to the technote for Mac OS 9.2. Other technotes contain information about the New World software architecture and the API changes for Power Manager 2.0. The technotes are available on the Technote website at

<http://developer.apple.com/technotes/>

Developers should also have copies of the relevant books describing the system software for Macintosh computers available in technical bookstores and on the World Wide Web at

<http://developer.apple.com/techpubs/macos8/mac8.html>

Open Firmware

Three Technotes provide an introduction to Open Firmware on the Macintosh platform. They are:

TN 1061: *Open Firmware, Part I*, available on the Technote website at

<http://developer.apple.com/technotes/tn/tn1061.html>

TN 1062: *Open Firmware, Part II*, available on the Technote website at

<http://developer.apple.com/technotes/tn/tn1062.html>

TN 1044: *Open Firmware, Part III*, available on the Technote website at

<http://developer.apple.com/technotes/tn/tn1044.html>

Supplemental Reference Documents

Another Technote tells how to debug open firmware code. Please refer to TN 2004: *Debugging Open Firmware Using Telnet*, available on the Technote web site at

<http://developer.apple.com/technotes/tn/tn2004.html>

RAM Expansion Modules

The mechanical characteristics of the RAM SO-DIMM are given in JEDEC specification number JEDEC MO190-C. The specification can be found by using the search string MO190-C on the Electronics Industry Association's website at

<http://www.jedec.org/DOWNLOAD/default.cfm>

The electrical characteristics of the RAM SO-DIMM are given in JEDEC Standard 21-C. The specification can be found by using the search string JESD21-C on the Electronics Industry Association's website at

<http://www.jedec.org/DOWNLOAD/default.cfm>

The RAM DIMMs are required to be PC133 or PC100 compliant. Information about the PC133 and PC100 specifications is available from Intel's website at

<http://developer.intel.com/technology/memory/pcsdram/>

PC Card Manager

For information about the CardBus and the PC Card Manager, refer to the CardBus DDK and the PC Card Manager SDK. The DDK and SDK are available on the Apple Developer World web page at

<http://developer.apple.com/sdk/index.html>

ATA Devices

For information about the system software for ATA devices such as the IDE drive, see Technote #1098, *ATA Device Software Guide Additions and Corrections*, available on the world wide web at

<http://developer.apple.com/technotes/tn/tn1098.html>

The web page for Technote #1098 includes a link to a downloadable copy of *ATA Device Software Guide*.

Information about the ATA standards is available at the Technical Committee T13 AT Attachment website, at

<http://www.t13.org/>

USB Interface

For more information about USB on Macintosh computers, you should refer to Apple Computer's *Mac OS USB DDK API Reference*. Information is also available on the World Wide Web, at

<http://developer.apple.com/techpubs/hardware/DeviceManagers/usb/usb.html>

USB game controllers are supported by the InputSprocket component of the Apple Games Sprockets software architecture. InputSprocket software and information about the InputSprocket APIs can be found at

<http://developer.apple.com/games/>

For full specifications of the Universal Serial Bus, you should refer to the USB Implementation Forum on the World Wide Web, at:

<http://www.usb.org/developers/home.php3>

FireWire Interface

For additional information about the FireWire IEEE 1394 interface and the Apple APIs for FireWire software, refer to the resources available on the Apple FireWire website at

<http://developer.apple.com/hardware/FireWire/index.html>

or send electronic mail to

firewire@apple.com

The IEEE 1394 standard is available from the IEEE. Ordering information can be found on the World Wide Web at

http://standards.ieee.org/reading/ieee/std_public/description/busarch/1394-1995_desc.html

You may also find useful information at the 1394 Trade Association's website:

<http://www.1394ta.org/>

Digital Visual Interface

For information about transition minimized differential signaling (TMDS) used with digital video monitors, see the specification, Digital Visual Interface DVI Revision 1.0, available on the web site of the Digital Display Working Group (DDWG) at

<http://www.ddwg.org/index.html>

Wireless Networks

More information about Wi-Fi and wireless networks using the IEEE 802.11 standard is available on the web site of the Wireless Ethernet Compatibility Alliance, at

<http://www.wirelessethernet.org/index.html>

Abbreviations

Here are lists of abbreviations used in this developer note.

Abbreviations and Standard Units

Standard units of measure used in this note include:

A	amperes	MB	megabytes
dB	decibels	Mbps	megabits per second
GB	gigabytes	Mbits	megabits
Hz	hertz	MHz	megahertz
KB	kilobytes	mm	millimeters
kg	kilograms	ns	nanoseconds
kHz	kilohertz	V	volts
mA	milliamperes	VDC	volts direct current
mAh	milliampere-hours		

Other Abbreviations

Other abbreviations used in this note include:

10Base-T	an Ethernet standard for data transmission at rates up to 10 Mbits per second
100Base-T	an Ethernet standard for data transmission at rates up to 100 Mbits per second
1000Base-T	an Ethernet standard for data transmission at rates up to 1000 Mbits per second
AGP	accelerated graphics port
AIM	ATA Interface Module
ANSI	American National Standards Institute
API	application programming interface
ASIC	application-specific integrated circuit
ATA	AT attachment
CAS	column address strobe, a memory control signal
CD	compact disc
CD-ROM	compact disc read-only memory
CPU	central processing unit
CRT	cathode ray tube, a video display device
DAA	data access adapter (a telephone line interface)
DAC	digital-to-analog converter
DDC	display data channel
DIMM	Dual Inline Memory Module
DB-DMA	descriptor-based direct memory access
DDK	device developer's kit

A P P E N D I X B

Abbreviations

DDR	double data rate, a type of SDRAM
DMA	direct memory access
DVI	Digital Visual Interface
EDO	extended data out
EIDE	enhanced integrated device electronics
G4	Generation 4, the fourth generation of PowerPC microprocessors, incorporating AltiVec technology
GND	ground
HFS	hierarchical file system
HID	human interface device, a class of USB devices
IC	integrated circuit
IDE	integrated device electronics
IEC	International Electrotechnical Commission
IIC	inter IC control bus
IIS	inter IC sound bus
I/O	input and output
ISO	International Organization for Standardization
JEDEC	Joint Electron Device Engineering Council
L1	level 1 or first level, a type of CPU cache
L2	level 2 or second level, a type of CPU cache
L3	level 3 or third level, a type of CPU cache
LED	light emitting diode
Mac OS	Macintosh Operating System
MDI	Medium Dependent Interface
MDI-X	Medium Dependent Interface with Cross-Over
modem	modulator-demodulator, a data communications interface for use with analog telephone lines
NMI	nonmaskable interrupt

A P P E N D I X B

Abbreviations

NOP	no operation
NVRAM	nonvolatile random-access memory
OHCI	Open Host Controller Interface
OS	operating system
PCI	Peripheral Component Interconnect, an industry-standard expansion bus
PLL	phase-locked loop
RAM	random-access memory
RCA	Radio Corporation of America
rms	root mean square
ROM	read-only memory
SBP	Serial Bus Protocol
SCSI	Small Computer System Interface
SDK	software developer's kit
SDRAM	synchronous dynamic RAM
SNR	signal to noise ratio
SO-DIMM	small outline dual inline memory module
SPD	Serial Presence Detect, a feature of the SO DIMM
TMDS	transition minimized differential signaling
USB	Universal Serial Bus, an industry-standard expansion bus
VCC	positive supply voltage (voltage for collectors)

Index

Numerals

3D graphics, reference information for 76

A

abbreviations 84
accelerated graphics port. *See* AGP
access to internal components 47, 67
AGP bus 27
AirPort Admin Utility 40
AirPort Application 40
AirPort Base Station 39
AirPort Card 38–40
 hardware components 39
 interface 30
 security features 39
 software components 39
AirPort Setup Assistant 39
ATA disk interface 40
 reference information for 80
ATA hard disk 40
 See also hard disk drive
ATI Mobility IC 26

B

block diagram 21, 22
boot ROM 25
booting from a FireWire device 35
booting from a USB device 32
buses 21, 23, 25

C

CardBus controller IC 30
CardBus slot 73
clock speeds 23
connectors
 Ethernet 36
 external monitor 59
 FireWire 33
 hard disk drive 43
 modem 38
 sound input 64
 sound output jack 64
 S-video 61
 USB 31
custom ICs
 KeyLargo I/O controller 27
 Uni-N memory controller and bridge IC 24

D

displays
 external monitors 58
 VGA, SVGA, and XGA monitors 58
 flat panel 55
 mirror mode
 resolution settings 57
 scaling function 56
DMA support 28
DVD-ROM/CD-RW drive 46

E

EDO devices not supported 67
Energy Star standard 19

INDEX

Ethernet controller 26
Ethernet port 36
external monitors 57–61
 connector 59
 mirror mode with 57
 pixel depths available 58
 VGA, SVGA, and XGA monitors 58

F

features 13
FireWire connector 33
FireWire controller 26
FireWire device drivers 35
FireWire device programming 35
FireWire port 33–36
 booting from 35
 connector 33
 device drivers 35
 Target Disk mode 35
FireWire, reference information for 81
flat panel display 55
Function-keys checkbox 52

G

G4. *See* PowerPC G4 microprocessor
graphics address remapping table (GART) 27
graphics IC 26

H

hard disk connector 43
 pin assignments on 43
 signals on 44
hard disk drive 40–45
 connector
 ATA signals on 44
 pin assignments on 43
 dimensions and mounting holes 40

I

I/O ports
 Ethernet 36
IDE hard disk 40
 See also hard disk drive
internal modem 29
interrupts 28

J

JEDEC specifications for SO-DIMMs 69

K

keyboard 47–55
 control keys with alternate functions 55
 effect of Function-keys checkbox 52
 Fn key 52
 keys with multiple functions 48
 Num Lock key 52
 removing 47, 67
Keyboard control panel 52
KeyLargo I/O controller IC 27

L

L2 cache 24
L3 cache 24

M

Mac OS 9, reference information for 78
machine identification 18
memory interleaving not supported 71
microprocessor 23
microprocessor clock speeds 23
mirror mode 57

INDEX

resolution settings for 57
modem 29, 38
monitor connector 59

N

new features 11
NTSC video monitor 61

O

Open Firmware 17
reference information for 78

P, Q

PAL video monitor 61
PCI bus 27
peripheral devices 16
pointing device 47
power controller IC 30
power saving modes 19, 30
PowerPC G4 microprocessor 23
PowerStep 18

R

RAM expansion 67–72
EDO devices not supported 67
maximum current limits 72
memory interleaving not supported 71
module sizes 71
SDRAM device specifications 70
sizes of SO-DIMMs 67
RAM expansion module
capacities 71
ROM. *See* boot ROM

S

scaling of display images 56
SCSI Disk mode 35
SDRAM devices 67
specifications of 70
serial presence detect, on SO-DIMM 70
Sleep mode 19
SO-DIMMs 67
address multiplexing on 71
configurations 71
electrical design of 69
electrical limits for 72
mechanical design of 69
SDRAM device specifications 70
serial presence detect on 70
sound circuitry 29
sound specifications 63
sound system 63–65
input sources 63
built-in microphone 64
external input 64
internal speakers 65
output devices 64
speakers 65
SuperDrive 46
SVGA monitors 58
S-video connector 61
system software 17
Idle mode 19
machine identification 18
Open Firmware 17
power saving modes 19
PowerStep 18
Sleep mode 19

T

Target Disk mode 35
3D graphics, reference information for 76
trackball 47
trackpad 47

INDEX

U

Uni-N memory controller and bridge IC 24
units of measure 83
Universal Serial Bus. *See* USB ports
USB connectors 31
USB controller IC 28
USB ports 31–33
 booting from 32
 connectors 31
 data transfer speeds 28, 32
USB, reference information for 80

V

VGA monitors 58
video display
 controller IC 26
 subsystem architecture 26
video monitors 58
 See also external monitors
video port 61

W

wireless LAN module. *See* AirPort Card

X, Y, Z

XGA monitors 58